



Venieri
SPA



**HIGH
EFFICIENCY** | **HE**

**7.63D
8.63C
9.63D
10.63D
WHEEL LOADERS**



STAGE 5

**7.63D
9.63D**

BUILDING, CONSTRUCTION AND INDUSTRY



KINEMATICS 4K

Latest generation kinematics, completely redesigned to guarantee maximum breakout force.



SAFETY IS OUR PRIORITY

The front axle internally integrates the negative/automatic parking brake for maximum safety in every operating situation.



CLEAN AIR AT ALL TIMES

Engine air filtration takes place via the main cartridge, safety cartridge and cyclone pre-filtration.



SILENT OPERATION

The commitment of Venieri's R&D in terms of noise reduction has resulted in a decrease of noise pollution below 70 dB; this value was certified on previous models and guarantees the operator maximum operating comfort.



BREATHTAKING VIEW

The new ROPS/FOPS Level II certified cabin guarantees 360° visibility, allowing total visual control over any equipment installed.



STAY COOL

The new ventilation system guarantees maximum comfort to the operator. You can choose between automatic climate control or air conditioning, thus obtaining the perfect temperature in the cabin.



100% VENIERI DESIGN

Maximum attention by the Venieri Style Center in preserving a "family feeling", despite the introduction of an engine with substantially larger dimensions than the previous Stage IIIB.



VENIERI DASH CONTROL

With the color electronic dash control the operator will be able to easily manage the electronic transmission, the available options and the reading of the transmission pressure.



TIER 4f DEUTZ TIER 4f ENGINE



New Deutz engine, compliant with the latest anti-pollution regulations with high torque already at low rpm. Substantial increase in power up to 21% and torque up to 17%, compared to previous models.



DOUBLE ATTENTION FOR SAVINGS

Electrically controlled and hydraulically operated double speed cooling fan. Rotation speed according to working conditions: reduced fuel consumption and low noise.



TOTAL STABILITY

All new Venieri loaders are equipped with an oscillating rear axle supported by maintenance-free supports.



VENIERI GLOBAL

Being connected is no longer optional for us. Thanks to the (standard) integrated Venieri Global system, the new Venieri loaders and your Smartphone become one. (Venieri Global annual subscription not included).



"SHIFT ON FLY" MECHANICAL GEARBOX

2-speed mechanical gearbox, with variation of the mechanical speed ratio and electronic shifting management (On VF 9.63D. On VF 7.63D the gear change is synchronized from standstill).



SMART FORWARD MOTION

Specific driving mode for the use of equipment that requires maximum oil flow combined with the possibility of low-speed transfers. Manageable transfer either by using the Venieri Dash Control or directly from the pedal, allowing the operator full control of vehicle and equipment, without ever taking his hands off the steering wheel.



AGILE BY VOCATION AND DESIGN

The particular design of the counterweight has been studied to obtain extremely high angles of operation, protect the LED street lights, ensure maximum maneuverability in tight spaces and prevent the ground from sticking when operating off-road.

8.63C 10.63D

BORN FOR AGRICULTURAL USE



PARALLEL KINEMATICS

Latest generation kinematics, which guarantees parallel operation with the forks along the entire arm movement range.



SAFETY IS OUR PRIORITY

The front axle internally integrates the negative/automatic parking brake for maximum safety in every operating situation.



CLEAN AIR AT ALL TIMES

Engine air filtration takes place via the main cartridge, safety cartridge and cyclone pre-filtration.



SILENT OPERATION

The commitment of Venieri's R&D in terms of noise reduction has resulted in a decrease of noise pollution below 70 dB; this value was certified on previous models and guarantees the operator maximum operating comfort.

360°



BREATHTAKING VIEW

The new ROPS/FOPS Level II certified cabin guarantees 360° visibility, allowing total visual control even if equipped with an extended parallel arm.



STAY COOL

The new ventilation system guarantees maximum comfort to the operator. You can choose between automatic climate control or air conditioning, thus obtaining the perfect temperature in the cabin.



100% VENIERI DESIGN

Maximum attention by the Venieri Style Center in preserving a "family feeling", despite the introduction of an engine with substantially larger dimensions than the previous Stage IIIB.



VENIERI DASH CONTROL

With the color electronic dash control, the operator will be able to easily manage the electronic transmission and the available options, and read the transmission pressure.


STAGE 5
DEUTZ TIER 4f ENGINE

New Deutz engine, compliant with the latest anti-pollution regulations with high torque already at low rpm. Substantial increase in power up to 21% and torque up to 17%, compared to previous models.


TOTAL STABILITY

All new Venieri loaders are equipped with an oscillating rear axle supported by maintenance-free supports.


TIRES FOR EVERY APPLICATION

Wide range of versatile agricultural tires of different sizes, depending on the type of terrain and use.


AGILE BY VOCATION AND DESIGN

The particular design of the counterweight has been studied to obtain extremely high angles of operation, protect the LED road lights, ensure maximum maneuverability in tight spaces and prevent the ground from sticking when operating off-road.


"SHIFT ON FLY" MECHANICAL GEARBOX

2-speed mechanical gearbox, with variation of the mechanical speed ratio and electronic shifting management (On VF 10.63D. On VF 8.63C the gear change is synchronized from standstill).

DOUBLE ATTENTION FOR SAVINGS

Electrically controlled and hydraulically operated double speed cooling fan. Rotation speed according to working conditions: reduced fuel consumption and low noise. Reversible fan kit available (optional).


**DOUBLE
SPEED**
VENIERI GLOBAL

Being connected is no longer optional for us. Thanks to the (standard) integrated Venieri Global system, the new Venieri loaders and your Smartphone become one. (Venieri Global annual subscription not included).


**VENIERI
GLOBAL**
SMART FORWARD MOTION


Specific driving mode for the use of equipment that requires high oil flow combined with low-speed transfers. Manageable transfer via the Venieri Dash Control or directly from the pedal, allowing the operator full control of vehicle and equipment, without ever taking his hands off the steering wheel.



THE CABIN



A BREATHTAKING VIEW.

Take a seat in your customized control room. Create your ideal work space by adjusting the pneumatic seat and the steering wheel to suit your specific needs. Select the commands, all at your fingertips. The excellent all-round visibility in which “blind spots” have been reduced to a minimum, offers the optimal view to work with maximum efficiency, allowing total visual and operational control over any installed equipment.

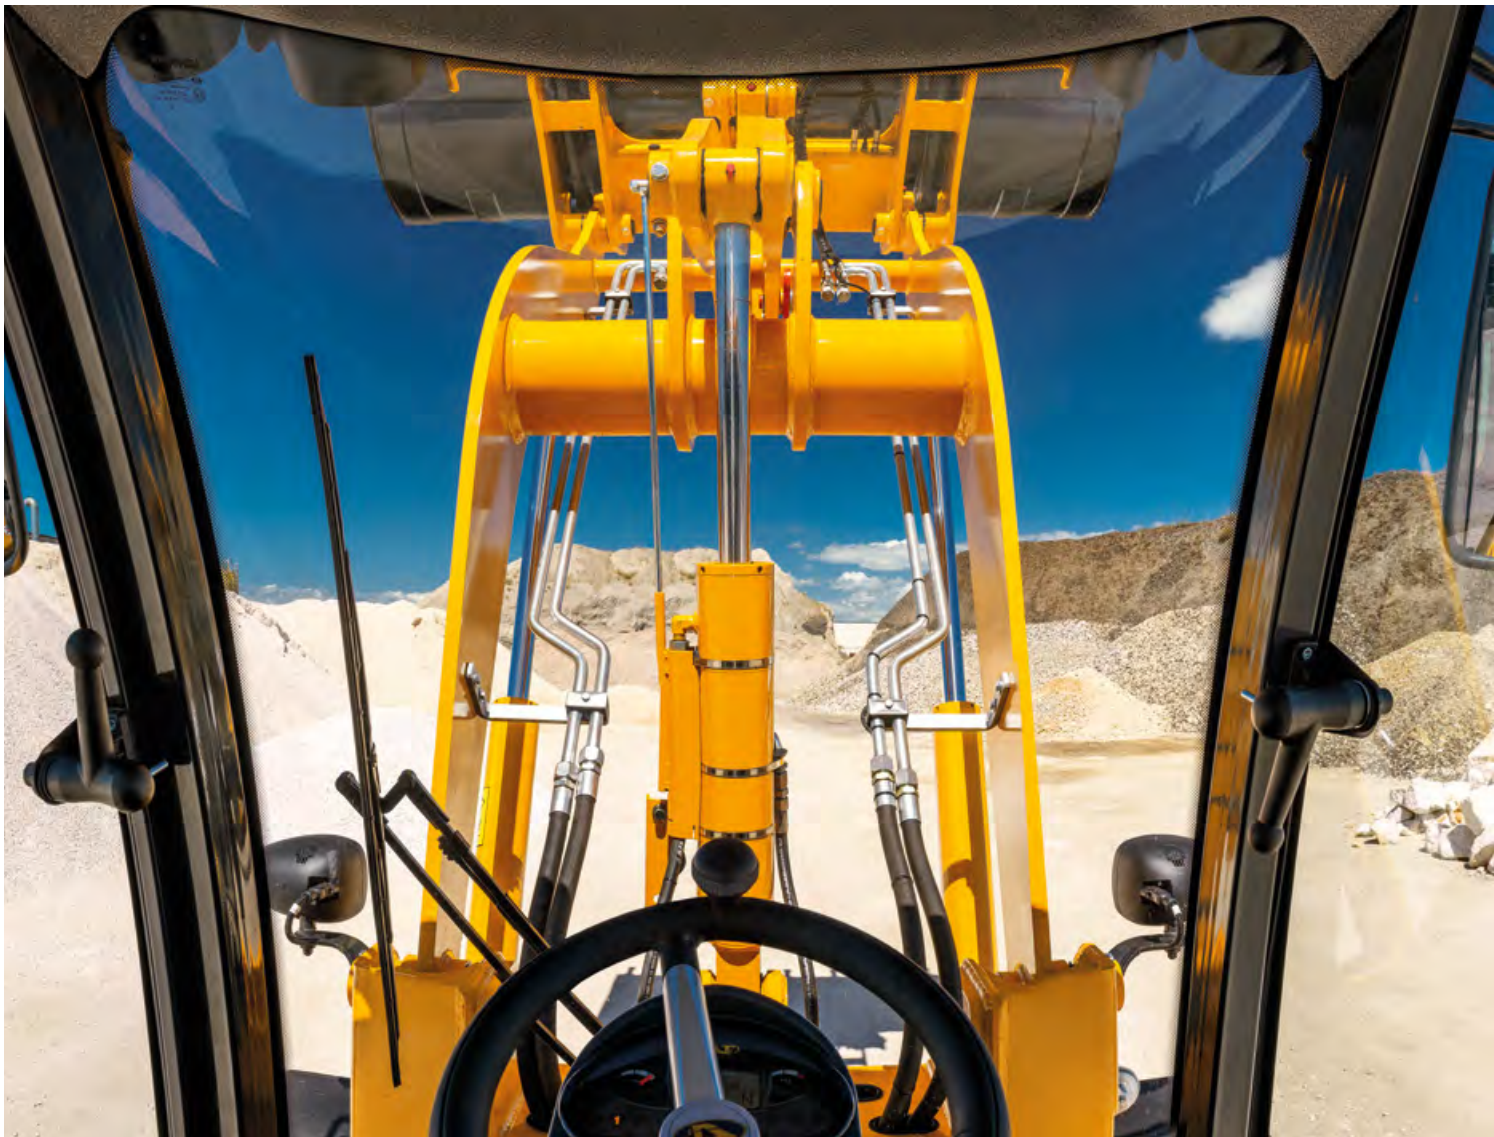


STAY COOL. AT ALL TIMES.

All the ventilation system (with 9 delivery points) has been completely redesigned for alignment to ISO10263 standards, and ensures easy maintenance of the heating and A/C unit, which can be completely tilted out of its housing. Using a single dashboard, the operator can select the ideal temperature, thus achieving maximum working comfort. All the Venieri wheel loaders can be equipped with Venieri Climatronic (optional): you set the temperature... and it will take care of the rest!

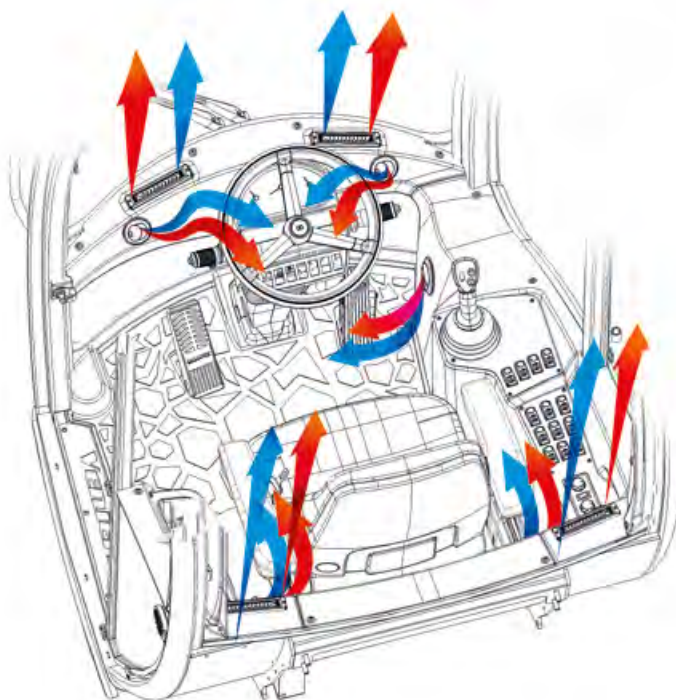

ENGINE AUX



TRANSMISSION AUX



**BLACK
BOX
EASY
ACCESS**

IT'S ALL HERE.

For the first time on a Venieri cabin, all the electronic components have been installed in a watertight box located in the cab frame, and accessible only from inside the passenger compartment; it is easy to access and complete with all the sockets required to perform diagnostics.

OPEN SESAME.

The double-opening door allows the operator to work with the access door closed, but with the upper glass open, thus ensuring maximum ventilation even when the A/C system is off and without protruding parts.



BEAUTY MEETS FUNCTIONALITY AT LAST.


In designing the cabin of the new wheel loaders, the Venieri Style Center tried to blend functionality and style, with the goal of manufacturing top-of-the-line machinery in terms of comfort and ergonomics. The new interior design has also made it possible to obtain various storage areas, which are very useful for storing small work tools, mobile phones, drinks and more.



POWER AND COMMANDS AT YOUR FINGERTIPS.

The mono-joystick* represents the ultimate in all-in-one technology: ergonomics and functionality at the operator's service.

** Optional, available on request.*

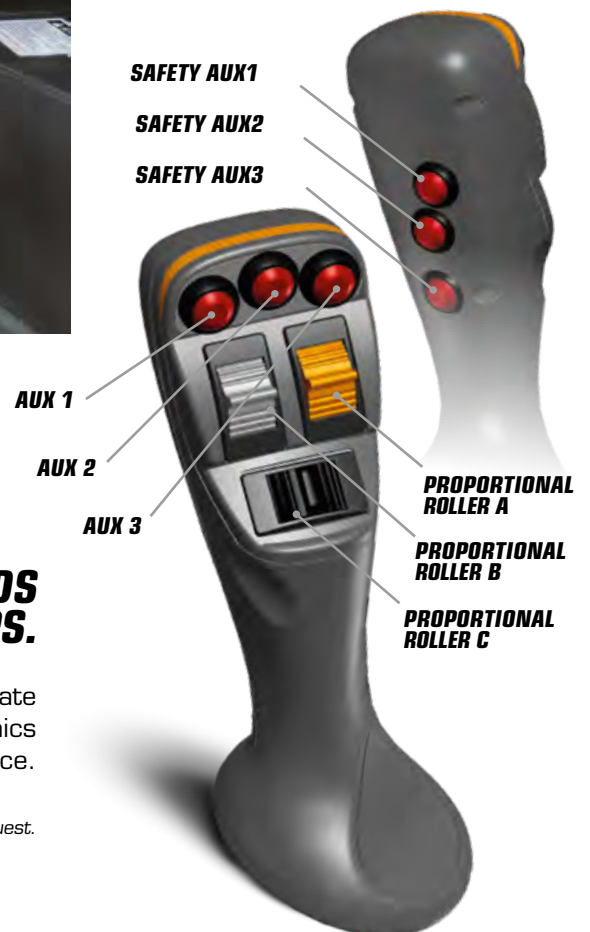

THE TRANSMISSION

HE A NEW VISION OF HYDROSTATIC EFFICIENCY

The increasingly stringent limits for exhaust emissions will continue to represent an ever-increasing challenge for the further technical development of mobile work machines. In addition, machine operators require increasingly greater efficiency and productivity.

The interconnection between electronic and hydraulic parts is essential in reducing fuel consumption and exhaust emissions, while also increasing the operating performance of the machine.

As a result, the extraordinary evolution of electronics applied to hydraulic power guarantees greater flexibility and a targeted response to address every different operational need more effectively.



SHIFT ON FLY. IT NEVER STOPS.

Mobile machines to support the speeds required in road travel are generally equipped with hydrostatic transmission and a gearbox that can be synchronized or automatic. In the first case (synchronized), the change from working gear to transfer is performed while stationary, while in the second case (SoF = automatic) the change takes place in motion.

The Dana-Rexroth transmission with electronically controlled hydrostatic pump and motor and a 367 SOf - Shift On Fly gearbox, also electronically operated, offers new opportunities for road driving, especially for wheel loaders. It allows the operator to operate at low speed with high traction forces, and later, during the transfer, change the mechanical ratio in torque, without stopping the machine, to reach a maximum speed of 25 mph (self-limited).



- **GREATER EFFICIENCY: HIGH TRACTION FORCE AND MAXIMUM TRANSFER SPEED**
- **HIGH COMFORT: FAST AND SYNCHRONIZED GEAR CHANGES WITHOUT INTERRUPTIONS**
- **VERY HIGH RELIABILITY SERIES COMPONENTS**
- **MEETS FUNCTIONAL SAFETY REQUIREMENTS**
- **COMPACT DIMENSIONS, REDUCED INSTALLATION SPACE**

BENEFITS



Dana Rexroth
Transmission Systems



METHOD OF USE

3 different driving modes are available, each with different characteristics to always guarantee maximum operational efficiency.



ECO



WORK



AUTOMOTIVE



CONTROL MODE

Essential for use with attachments, these modes allow adjusting the machine's forward motion (by power meter or pedal) with all the hydraulic power available for the attachment.



POWER & SPEED



CREEP



CREEP MODE *PLUS*



ELECTRONIC DASHBOARD

Control the main functions of the machine with a finger. "DASH" digital panel necessary to select ALL the machine transmission modes and settings.



INTUITIVE CONTROLS



EASY TO USE



REAL TIME DIAGNOSTIC

**HIGH
EFFICIENCY** // **HE**






SAFETY ON BOARD

Several safety controls operated by the Rexroth control unit allow the user to operate in total safety, with maximum efficiency and without the risk of machine downtime.




SELF DIAGNOSIS



ELECTRONIC TRANSMISSION MANAGEMENT

It guarantees an optimized distribution of the available power to reduce consumption and increase performance.




**ARTIFICIAL
INTELLIGENCE**



INTERCONNECTED MACHINE

A machine totally interconnected and controlled entirely in the Cloud. Welcome to the future.

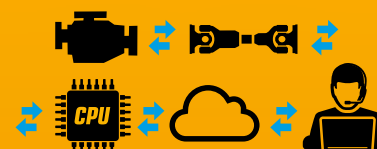

- PREDICTIVE MAINTENANCE
- REAL-TIME DATA & DIAGNOSIS
- SELF-LEARNING
- MACHINE IN CLOUD



VENIERI 4.0 (OPTIONAL)

The VENIERI DASH CONTROL electronic Dashboard allows the operator to manage and view some of the most important functions of the machine with utmost ease and efficiency.

ECO MODE

ECO mode control screen, for a "softer" setting of the transmission response curve and limitation on engine RPM at max 1700 RPM



INSTANT
CONSUMPTION
RESIDUAL
OPERATION

CREEP
PLUS

SMART FORWARD MOTION

Essential for use with attachments, these modes allow adjusting the machine's forward motion (by power meter or pedal) with all the hydraulic power available for the attachment.



ENGINE
LOAD
TURBO
PRESSURE

AUTOMOTIVE

AUTOMOTIVE mode control screen, in which we have an average setting of the transmission response curve and all available engine revolutions



ENGINE
LOAD

WORK

WORK mode control screen, in which we have the inhibition of the shifting, first gear from 9 mph instead of 6 mph and setting for the response curve of the more "aggressive" transmission



TRANSMISSION
ERRORS
TRANSMISSION
PRESSURES

DIAGNOSTIC

Screen for checking diagnostic errors and pressures.



MANUAL ACCELERATOR

Engine RPM display and control screen for use with attachments



VENIERI
DASH
CONTROL

The screens shown on this page
are for VF 9.63D and VF 10.63D.



ALL-SEASONS MACHINE.

The multifunction properties of the new loaders is achieved with the single multifunction connection plate, an essential implementation to make them a universal tool carrier.



69dB
INTERNAL

SILENCE IS A VIRTUE.

The noise level of the new loader is simply extraordinary. With only 69dB of internal noise in the cabin, you will not even realize that you are working; you can also use very convenient options, such as the Bluetooth™ hands-free kit with maximum effectiveness.

25 mph
SELF-LIMITED

VR000000000M!

Driving speed 25 mph*, self-limited. On the other hand, Venieri is based in the heart of the Italian Motor Valley and... the speed of our machines cannot be an option!

POWER AND EFFICIENCY WHERE YOU NEED THEM MOST.

A lot of power for the hydraulic system and, at the same time, a reduction in travel speed. For these reasons the new Venieri wheel loaders need a single pedal. The brake pedal with inching function can control both the mechanical and the hydraulic (inching) brake. Obvious advantages are less wear on the service brake and optimal distribution of engine power.



NO PRESSURE

on the inching/brake pedal: maximum power for traction.




NORMAL PRESSURE

on the inching/brake pedal: speed reduction, more power in the service hydraulic system.



MAX PRESSURE

on the inching/brake pedal: the wheel loader stops, maximum strength to the hydraulic system

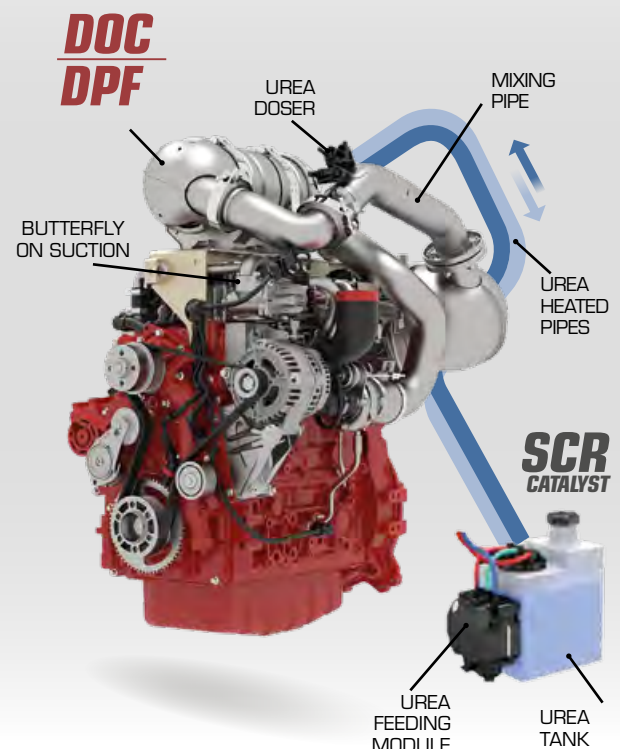



ENGINE MANAGEMENT

Engines equipped with DEUTZ Common Rail® injection communicate with the machine via a CAN-Bus protocol. This allows functions such as drive-by-wire and full engine control to be integrated into electronically controlled hydrostatic thrusters. The automatic electronic control also guarantees the integrated engine diagnosis and safety system. If the controller registers an abnormal motor status, as in the case of overheating, engine performance is

reduced to emergency mode until it shuts down. This minimizes costly repairs, reduces equipment downtime and increases operational reliability.

COMMON RAIL


The powerful Common Rail® injection system and the Electronic Engine Control (EMR) with smart connection to engine management ensure optimum engine performance with low fuel consumption.

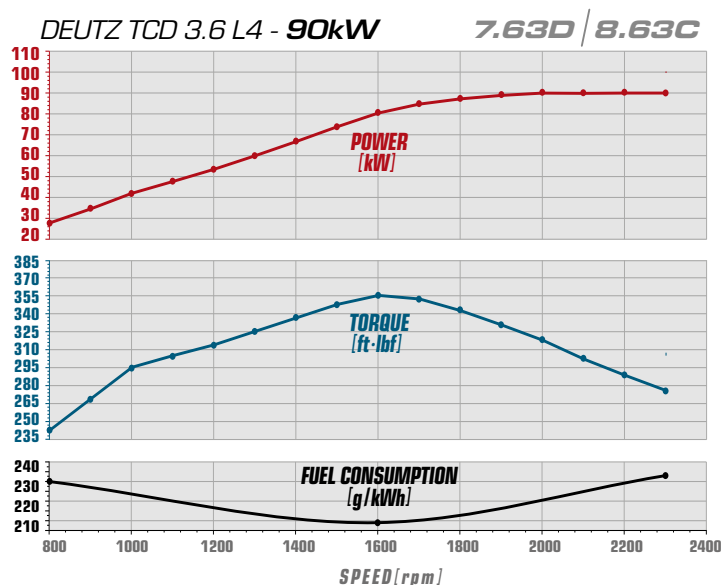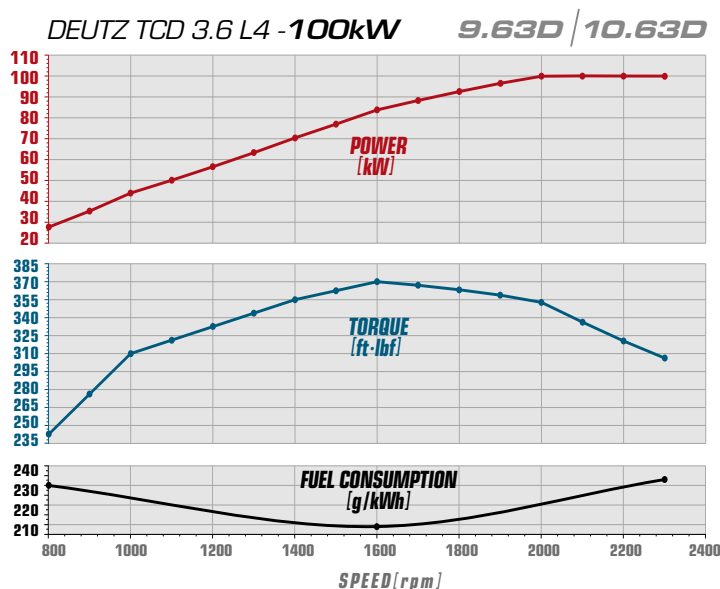

EVOLUTION IN PERFORMANCE

Performance step-up guaranteed by the technological evolution of the brand new Deutz engine that is installed in the new Venieri loaders is evident in every area of use when compared to the previous generation of wheel loaders. And always with the utmost respect for the environment and consumption.

eco mode FUEL CONSUMPTION

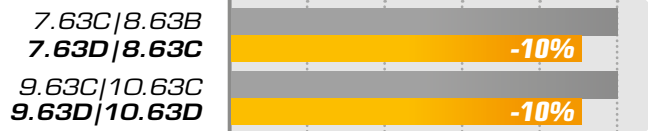

PTO



POWER



UPHILL SPEED POWER



CABIN INTERNAL NOISE



Venieri GLOBAL


CONTROL YOUR FLEET

Venieri GLOBAL™ is our brand-new satellite monitoring system, which guarantees an increase in productivity by providing detailed information about the fleet and attachments, as well as an incredible amount of data to ensure the highest performance levels and greater economic efficiency.

A V A I L A B L E F E A T U R E S

Machine localisation	✓	Work shifts alarm	✓
Alerts history	✓	Standard operating procedure history	0
Maintenance plan	✓	Energy-saving guidelines history	0
Maintenance history	✓	Location log	✓
Load information	✓	(map with locations and operating procedures)	✓
Working hours	✓	Information about diesel particulate filter	✓
Security control (engine block)	0	Geo-fencing	✓
Fuel consumption (total and partial)	✓	Localisation and management fleet	✓
Fuel consumption while working	✓	Multiuser control with specific access policies	✓
Machine efficiency (while working)	✓	List of "sleeping" machines	✓
Detailed working hours	✓	Sms/e-mail notification	✓
Motion sensor alarm	✓	Anti-theft alarm	✓
Curfew alarm setting	✓	Parameters setting upon request	0

✓ Standad 0 Optional X Not available

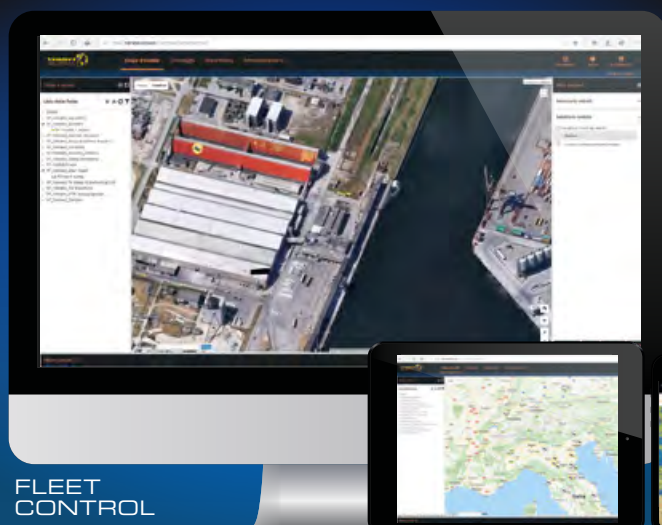


FLEET CONTROL

PRODUCTIVITY REPORT



REPORTISTICA: CONSUMO CARBURANTE
DA: 11/10/2018 00:00:00 - A: 11/10/2018

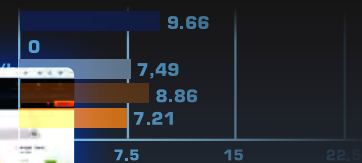

REAL-TIME LOCALISATION



APP FOR SMARTPHONE
iOS™ AND ANDROID™



MACHINE EQUIPMENT

	7.63D	8.63C	9.63D	10.63D
Battery switch	✓	✓	✓	✓
Maintenance tool set	✓	✓	✓	✓
Diesel preheating for cold start	0	0	0	0
Cap with key for fuel tank	✓	✓	✓	✓
Self-locking proportional differential on the front axle	✓	✓	✓	✓
Self-locking proportional differential on the rear axle	0	0	0	0
Differential with 100% locking on the front axle	0	0	0	0
Tow hook	✓	✓	✓	✓
Rotating lamp	✓	✓	✓	✓
Soundproofing	✓	✓	✓	✓
Spare parts catalogue	✓	✓	✓	✓
Use and maintenance manual	✓	✓	✓	✓
Type approval for operation on roads	✓	✓	✓	✓
Arm and bucket lock safety device	✓	✓	✓	✓
Device for bucket positioning parallel to the ground	✓	✓	✓	✓
CREEP mode	0	0	0	0
CREEP mode Plus	0	0	0	0
Venieri GLOBAL satellite monitoring (Annual subscription not included)	✓	✓	✓	✓
Double-speed hydraulic fan	✓	✓	✓	✓
Reversible fan for radiator cleaning	0	0	0	0
Negative parking brake	✓	✓	✓	✓
Service brake on both decks with separate circuits	✓	✓	✓	✓
Inch pedal integrated on the brake pedal	✓	✓	✓	✓
Greasing points grouped on frames	✓	✓	✓	✓
Automatic centralized greasing	0	0	0	0
Ride control	0	0	0	0
Water preheating system	0	0	0	0
Hydraulic oil preheating system	0	0	0	0
Biodegradable hydraulic oil	0	0	0	0
ISO 46 hydraulic oil (cold climates) (On request in Italy)	✓	✓	✓	✓
Vortex prefilter	✓	✓	✓	✓
LED rear lights	✓	✓	✓	✓
Electronically controlled hydrostatic transmission with 2 modes of use (Automotive and ECO)	✓	✓	X	X
Electronically controlled hydrostatic transmission with 3 modes of use (Automotive, Work and ECO)	X	X	✓	✓
Gearbox with 2 mechanical gears and synchronizer (gearbox from standstill)	✓	✓	X	X
Gearbox with 2 mechanical Shift on Fly ratios selectable on the go	X	X	✓	✓



CABIN EQUIPMENT

ROPS/FOPS Level II, pressurized and soundproofed cabin	✓	✓	✓	✓
Front and rear windshield wipers with washer	✓	✓	✓	✓
Halogen work lights (4 front + 2 rear)	✓	✓	✓	✓
Work LED lights (4 front + 2 rear)	0	0	0	0
Mobile phone compartment	✓	✓	✓	✓
Bottle holder	✓	✓	✓	✓
Document compartment	✓	✓	✓	✓
Seat with mechanical suspension	✓	✓	✓	✓
Seat with pneumatic suspension	0	0	0	0
Seat with pneumatic suspension and heating	0	0	0	0
Armrests on seat	✓	✓	✓	✓
Buzzer	✓	✓	✓	✓
Cabin carpet	✓	✓	✓	✓
Clothes hangers	✓	✓	✓	✓
radio wiring	✓	✓	✓	✓
Additional 12V socket	✓	✓	✓	✓
"Manual" air conditioning	0	0	✓	✓
"Climatronix Venieri" automatic climate system	0	0	0	0
Internal courtesy light	✓	✓	✓	✓
Sunblind	✓	✓	✓	✓
Rear-view mirrors	✓	✓	✓	✓
Heated rear-view mirrors	0	0	0	0
First-aid kit	0	0	0	0
2 kg fire extinguisher	0	0	0	0
Safety seat belt	✓	✓	✓	✓
Instrumentation and dashboard complete with LCD display	✓	✓	✓	✓
Venieri Dash Control	✓	✓	✓	✓
Glass breaker hammer	✓	✓	✓	✓



EQUIPMENT

Hydraulic or mechanical quick coupler	0	0	0	0
Mixing bucket	0	0	0	0
4-in-1 multipurpose bucket	0	0	0	0
Universal lifting forks	0	0	0	0
Asphalt/concrete planner	0	0	0	0
Snow blower	0	0	0	0
Snow blade or "V" blade	0	0	0	0
Angle-tilt dozer	0	0	0	0
Hand hammer	0	0	0	0
Sweeper	0	0	0	0
Trencher	0	0	0	0
High-tip bucket	0	0	0	0
High-flow system	0	0	0	0
Unpressurized return line	0	0	0	0
Double auxiliary system	0	0	0	0
Rear hydraulic outlets (single effect)	0	0	0	0

NOTE - standard configuration may vary from market to market:
please, always verify with the dealer.

✓ Standard

0 Optional

X Not available

Z.63D

Z KINEMATICS



DIESEL ENGINE

4 in-line cylinders, supercharged, charge air cooling, electronically controlled, common-rail injection, exhaust gas recirculation, water cooling, dry filtration, oxidation catalyst (DOC) particulate filter (DPF) and selective catalytic reduction (SCR). Issued according to EC Directive 97/68 - Tier 4f.

Type	Deutz TCD 3.6 L4
Max. power	94,5 kW - 128 HP
Calibration (RPM)	2.300
ISO/TR 14396 power	90 kW - 122 HP
EEC 80/1269 power	90 kW - 122 HP
Maximum torque	lbf ft 354
Bore	in 3.86
Stroke	in 4.72
Displacement	in ³ 220.91



ELECTRIC SYSTEM

Battery	12 Volt
Capacity	110 Ah - 850 A
Alternator	95 A
Reverse gear alarm	Standard
Cabling compliant with regulations	IP 67 - DIN 40050



TRANSMISSION

Hydrostatic with electronic power regulation and closed circuit with variable displacement pump and motor. 3 driving modes: Automotive, Eco and Smart Forward Motion*. 2-speed mechanical gearbox with synchronizer (gear change from standstill).

2 Work Speeds	Forward	Reverse
1 st gear mph	0 ÷ 4	0 ÷ 4
2 nd gear mph	0 ÷ 8	0 ÷ 8

2 Transfer Speeds	Forward	Reverse
1 st gear mph	0 ÷ 11	0 ÷ 11
2 nd gear mph	0 ÷ 25**	0 ÷ 25**

* Optional, on request. ** Self-limited maximum speed



AXLES

Heavy Duty axles of the same size with epicyclic final reduction gears on each wheel. Rigid front axle. Oscillating rear axle with 25° travel. Distribution of the movement to the two front and rear axles by means of cardan shafts. Automatic self-locking differential on the front axle (optional on the rear)



BRAKING SYSTEM

Service brake: hydraulic multi-disc oil bath on front & rear axles. Parking brake: negative hydraulic, electrically operated, on the front axle.



TIRES

Standard	15.5 x 25
----------	-----------



STEERING SYSTEM

Power assisted steering by LOAD SENSING power steering.

Steering angle	80°
Tire inner turning radius	ft in 8'10.42"
Tire outer turning radius	ft in 15'7.24"
Bucket outer turning radius*	ft in 17'3.48"

* in transfer position



HYDRAULIC SYSTEM

Comprising two gear pumps, the first for the loader and steering circuit with LOAD SENSING valve, the second for the fan circuit, having a double rotation speed. Modular 2-section distributor with general valve. Double acting jacks. Hydraulic oil cooling radiator. Full-flow filter on the return circuit.

Single lever servo control for 4-position lifting control and 3-position bucket control.

Max flow rate	gpm 27.74
Flow rate with high-flow kit (optional)	gpm 34.34
Loader calibration pressure	psi 3,626
Steering calibration pressure	psi 2,538
Lifting jacks	in 3.35x32.56
Bucket jacks	in 3.94x14.96
Lifting time (full)	s 5.1
Lowering time (empty)	s 3.1
Unloading time	s 1.2
Total cycle time	s 9.4



FLUIDS & LUBRICANTS

Engine	gal 2.11
Front differential	gal 2.43
Rear differential	gal 2.4
Reduction gear/adaptor	gal 0.48
Hydraulic circuit	gal 33.81
Brake circuit	gal 0.24
Fuel	gal 36.98
Water radiator	gal 5.28
AdBlue	gal 5.28



TECHNICAL FEATURES

Standard bucket capacity	yd ³ 1.83
Bucket width	ft in 7'4.58"
Static tipping load on a horizontal surface	lb 12,346
Static tipping load turned 40°	lb 11,023
Hydraulic lifting capacity at max. height	lb 12,346
Hinge pin height	ft in 11'10.32" (11'8.35")*
Dump height at 40°	ft in 9'5.78" (9'3.81")*
Dump distance at 40°	in 33.27 (35.24)*
Breakout force	lb 20,063

* [...] With optional 405/70 R24 tires



DIMENSIONS & WEIGHTS


Max length in transfer position	ft in 19'4.28"
Max. width in transfer position	ft in 7'4.58"
Tire outer width	ft in 6'11.35"
Tread width	ft in 5'7.32"
Pitch	ft in 8'4.79"
Clear span	in 11.02 (9.06)*
Max height	ft in 9'7.67" (9'5.7")*
Standard operating weight	lb 17,328 (16,755)*
Maximum weight	lb 19,290

* [...] With optional 405/70 R24 tires




NOISE LEVEL

Noise level inside cabin ISO 6396 - LpA	dB(A) 69
External noise level ISO 6395 - LwA	dB(A) 101

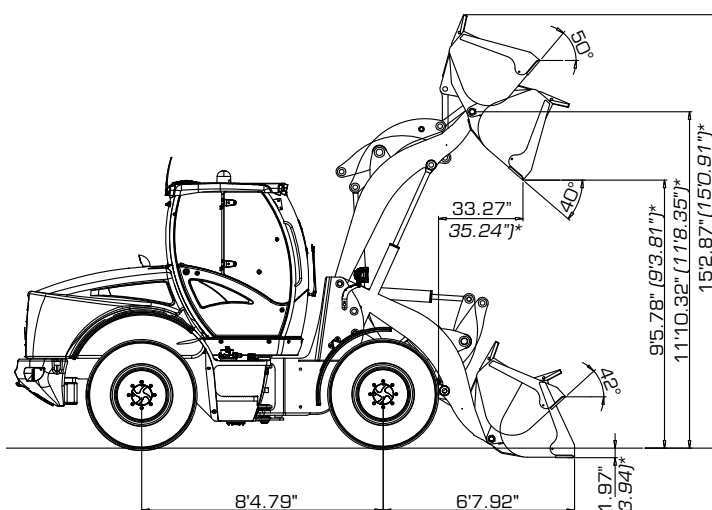

*[...] With optional 405/70 R24 tires

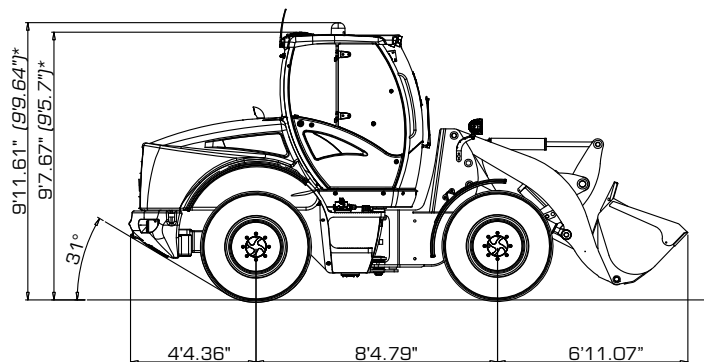

PERFORMANCE DATA



STANDARD



MULTIPURPOSE



OVERSIZE



FORKS

Heaped Bucket Capacity (SAE)	yd ³	1.83	1.44	2.62	/
Bucket width	ft in	7'4.58"	7'4.58"	8'2.43"	/
Bucket weight	lb	1,102	1,323	1,323	/
Max operating height	ft in	15'2.87" (15'0.91")*	14'11.53" (14'9.56")*	14'11.53" (14'9.56")*	/
Fork length (standard)	ft in				3'3.37"
Fork length (optional)	ft in				3'11.24"
Hinge pin height	ft in	11'10.32" (11'8.35")*	11'10.32" (11'8.35")*	11'10.32" (11'8.35")*	/
Dump angle	°	40°	40°	40°	/
Dump height	ft in	9'5.78" (9'3.81")*	9'7.75" (9'5.78")*	9'3.81" (9'1.84")*	/
Dump distance	ft in	2'9.27" (2'11.24")*	2'7.3" (2'4.15")*	2'10.84" (2'7.69")*	/
Static tipping load on a horizontal surface	lb	12,346	12,566	11,905	/
Static tipping load - mach. turned	lb	11,023	11,244	10,582	/
Fork tipping load - mach. turned	lb				8,267
Operating load EN 474-3 (80%) [•]	lb				6,614
Operating load EN 474-3 (60%) [•]	lb				4,960
Breakout force	lb	20,062	22,267	18,960	/
Max length in transfer position	ft in	19'4.28"	19'2.11"	19'8.02"	/
Bucket outer turning radius	ft in	17'3.48"	25'5.51" (24'7.28")*	17'8.8"	/
Standard operating weight	lb	17,328 (16,755)*	17,107 (16,535)*	17,549 (16,976)*	/

*[...] With optional 405/70 R24 tires [•] Load center at 19.69"



MOST COMMON OPTIONAL TIRES | OTHER TIRES UPON REQUEST



15,5 R25 MICHELIN XTLA

L2 tire for multiple uses on different terrains, with excellent traction force.

Machine width:
ft in 6'10.95"



15,5 x 25 CAMSO LOADMASTER L3

Tire optimized for all surfaces, with excellent resistance to side impacts and improved stability.

Machine width:
ft in 6'11.74"



405/70 R24 DUNLOP SPT9

Multi-purpose non-directional, radial tire for industrial and construction applications.

Machine width:
ft in 7'3.28"



455/70 R24 DUNLOP SPT9

Non-directional, radial tire for construction and industrial applications.

Machine width:
ft in 7'3.09"



440/80 R24 MICHELIN XCML

Long-life agricultural tire, exceptional traction and load capacity.

Machine width:
ft in 7'5.41"



15,5 R25 NOKIAN LOADER GRIP 2

Tire for exceptional traction on soft or frozen ground.

Machine width:
ft in 6'10.83"

8.63C

PARALLEL KINEMATICS



DIESEL ENGINE

4 in-line cylinders, supercharged, charge air cooling, electronically controlled, common-rail injection, exhaust gas recirculation, water cooling, dry filtration, oxidation catalyst (DOC) particulate filter (DPF) and selective catalytic reduction (SCR). Issued according to EC Directive 97/68 - Stage V/Tier 4f.

Type	Deutz TCD 3.6 L4
Max. power	94,5 kW - 128 HP
Calibration (RPM)	2.300
ISO/TR 14396 power	90 kW - 122 HP
EEC 80/1269 power	90 kW - 122 HP
Maximum torque	lbf ft 354
Bore	in 3.86
Stroke	in 4.72
Displacement	in³ 220.91



ELECTRIC SYSTEM

Battery	12 Volt
Capacity	110 Ah - 850 A
Alternator	95 A
Reverse gear alarm	Standard
Cabling compliant with regulations	IP 67 - DIN 40050



TRANSMISSION

Hydrostatic with electronic power regulation and closed circuit with variable displacement pump and motor. 3 driving modes: Automotive, Eco and Smart Forward Motion*. 2-speed mechanical gearbox with synchronizer (gear change from standstill).

2 Work Speeds	Forward	Reverse
1 st gear km/h	0 ÷ 4	0 ÷ 4
2 nd gear km/h	0 ÷ 8	0 ÷ 8

2 Transfer Speeds	Forward	Reverse
1 st gear km/h	0 ÷ 11	0 ÷ 11
2 nd gear km/h	0 ÷ 25**	0 ÷ 25**

* Optional, on request. ** Self-limited maximum speed



AXLES

Heavy Duty axles of the same size with epicyclic final reduction gears on each wheel. Rigid front axle. Oscillating rear axle with 25° travel. Distribution of the movement to the two front and rear axles by means of cardan shafts. Automatic self-locking differential on the front axle (optional on rear)



BRAKING SYSTEM

Service brake: hydraulic multi-disc oil bath on front & rear axles. Parking brake: negative hydraulic, electrically operated, on the front axle



TIRES

Standard	460/70 R24
----------	-------------------



STEERING SYSTEM

Power assisted steering by LOAD SENSING power steering.

Steering angle	80°
Tire inner turning radius	ft in 8'5.97"
Tire outer turning radius	ft in 15'11.73"
Bucket outer turning radius*	ft in 17'6.63"

* in transfer position



HYDRAULIC SYSTEM

Comprising two gear pumps, the first for the loader and steering circuit with LOAD SENSING valve, the second for the fan circuit, having a double rotation speed. Modular 2-section distributor with general valve. Double acting jacks.

Hydraulic oil cooling radiator. Full-flow filter on the return circuit. Single lever servo control for 4-position lifting control and 3-position bucket control.

Max flow rate	gpm 27.74
Flow rate with high-flow kit (optional)	gpm 34.34
Loader calibration pressure	psi 3,336
Steering calibration pressure	psi 2,538
Lifting jacks	in 4.13x31.3
Bucket jacks	in 3.15x26.77
Lifting time (full)	s 5.4
Lowering time (empty)	s 3.9
Unloading time	s 1.8
Total cycle time	s 11.1



FLUIDS & LUBRICANTS

Engine	gal 2.11
Front differential	gal 2.43
Rear differential	gal 2.4
Reduction gear/adaptor	gal 0.48
Hydraulic circuit	gal 33.81
Brake circuit	gal 0.24
Fuel	gal 36.98
Water radiator	gal 5.28
AdBlue	gal 5.28



TECHNICAL FEATURES

Standard bucket capacity	yd³ 1.57
Bucket width	ft in 7'4.58"
Static tipping load on a horizontal surface	lb 11,354
Static tipping load turned 40°	lb 10,141
Hydraulic lifting capacity at max. height	lb 22,046
Hinge pin height	ft in 12'4.62"
Dump height at 40°	ft in 9'8.93"
Dump distance at 40°	ft in 3'5.54"
Breakout force	lb 20,723





DIMENSIONS & WEIGHTS

Max length in transfer position	ft in 20'3.31"
Max. width in transfer position	ft in 7'4.58"
Tire outer width	ft in 7'3.8"
Tread width	ft in 5'9.68"
Pitch	ft in 8'4.79"
Clear span	in 9.84
Max height	ft in 9'5.78"
Standard operating weight	lb 18,078
Maximum permissible weight	lb 19,290



NOISE LEVEL

Noise level inside cabin ISO 6396 - LpA	dB(A) 69
External noise level ISO 6395 - LwA	dB(A) 101

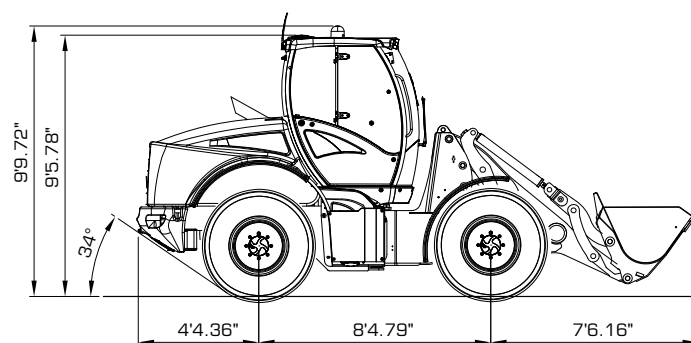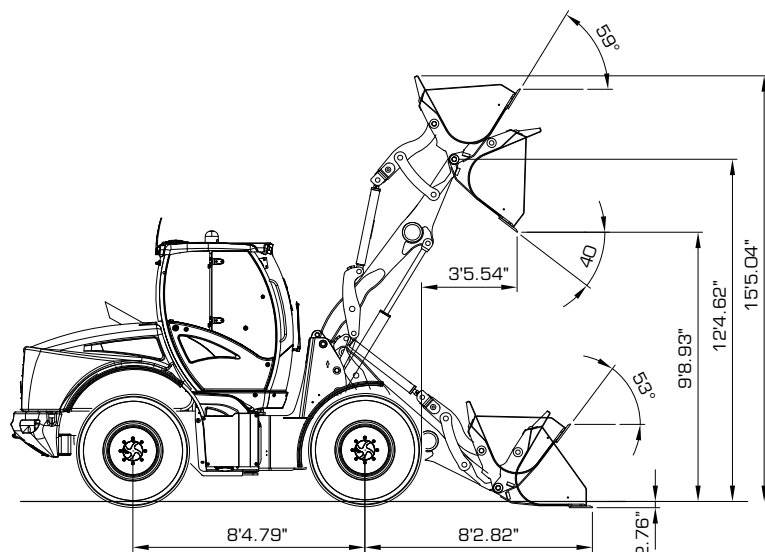

PERFORMANCE DATA


STANDARD

MULTIPURPOSE

OVERSIZE

FORKS

Heaped Bucket Capacity (SAE)	yd ³	1.57	1.44	2.62	/
Bucket width	ft in	7'4.58"	7'8.52"	8'2.43"	/
Bucket weight	lb	992	1,212	1,323	/
Max operating height	ft in	15'5.04"	15'1.69"	15'1.69"	/
Fork length (standard)	ft in				3'3.37"
Fork length (optional)	ft in				3'11.24"
Hinge pin height	ft in	12'4.62"	12'4.62"	12'4.62"	/
Dump angle	°	40°	40°	40°	/
Dump height	ft in	9'8.93"	9'10.9"	9'6.96"	/
Dump distance	ft in	3'5.54"	3'3.57"	3'7.11"	/
Static tipping load on a horizontal surface	lb	11,354	11,133	10,913	/
Static tipping load - mach. turned	lb	10,141	9,921	9,700	/
Fork tipping load - mach. turned	lb				7,716
Operating load EN 474-3 (80%) [•]	lb				6,173
Operating load EN 474-3 (60%) [•]	lb				4,630
Breakout force	lb	20,723	22,928	19,621	/
Max length in transfer position	ft in	20'3.31"	20'1.14"	20'7.05"	/
Bucket outer turning radius	ft in	17'6.63"	17'5.65"	17'11.94"	/
Standard operating weight	lb	18,078	18,298	18,409	/

[•] Load center at 19.69"



MOST COMMON OPTIONAL TIRES | OTHER TIRES UPON REQUEST


**15.5 x 25
MITAS EM60**

L3 tire suitable for heavy use with excellent self-cleaning properties.

Machine width:
ft in 6'10.83"


**405/70 MITAS
EM01 o MPT21**

Not directional multi-purpose tire.

Machine width:
ft in 6'11.35"


**440/80 R24
MICHELIN XCML**

Agricultural tire long duration with high traction and high load capacity.

Machine width:
ft in 7'3.05"


**500/70 R24
ALLIANCE A580**

Tire with an exclusive profile which guarantees strong traction, specific for soft surfaces.

Machine width:
ft in 7'5.57"

9.63D

Z KINEMATICS



DIESEL ENGINE

4 in-line cylinders, supercharged, charge air cooling, electronically controlled, common-rail injection, exhaust gas recirculation, water cooling, dry filtration, oxidation catalyst (DOC) particulate filter (DPF) and selective catalytic reduction (SCR). Issued according to EC Directive 97/68 - Stage V/Tier 4f.

Type	Deutz TCD 3.6 L4
Max. power	105 kW - 143 HP
Calibration (RPM)	2.300
ISO/TR 14396 power	100 kW - 136 HP
EEC 80/1269 power	100 kW - 136 HP
Maximum torque	lbf ft 369
Bore	in 3.86
Stroke	in 4.72
Displacement	in³ 220.91



ELECTRIC SYSTEM

Battery	12 Volt
Capacity	110 Ah - 850 A
Alternator	95 A
Reverse gear alarm	Standard
Cabling compliant with regulations	IP 67 - DIN 40050



TRANSMISSION

Hydrostatic with electronic power regulation and closed circuit with variable displacement pump and motor.

4 driving modes: Automotive, Work, Eco and Smart Forward Motion*. 2-speed mechanical gearbox with mechanical speed ratio variation (Shift On Fly).

2 Work Speeds	Forward	Reverse
1 st gear mph	0 ÷ 4	0 ÷ 4
2 nd gear mph	0 ÷ 10	0 ÷ 10

2 Transfer Speeds	Forward	Reverse
1 st gear mph	0 ÷ 9	0 ÷ 9
2 nd gear mph	0 ÷ 25**	0 ÷ 25**

* Optional, on request. ** Self-limited maximum speed



AXLES

Heavy Duty axles of the same size with epicyclic final reduction gears on each wheel. Rigid front axle.

Oscillating rear axle with 25° travel.

Distribution of the movement to the two front and rear axles by means of cardan shafts. Automatic self-locking differential on the front axle (optional on the rear).



BRAKING SYSTEM

Service brake: hydraulic multi-disc oil bath on front & rear axles. Parking brake: negative hydraulic, electrically operated, on the front axle.



TIRES

Standard	17.5 x 25
----------	------------------



STEERING SYSTEM

Power assisted steering by LOAD SENSING power steering.

Steering angle	80°
Tire inner turning radius	ft in 8'11.6"
Tire outer turning radius	ft in 16'1.23"
Bucket outer turning radius*	ft in 17'8.83"

* in transfer position



HYDRAULIC SYSTEM

Comprising two gear pumps, the first for the loader and steering circuit with LOAD SENSING valve, the second for the fan circuit, having a double rotation speed

Modular 2-section distributor with general valve.

Double acting jacks. Hydraulic oil cooling radiator.

Full-flow filter on the return circuit.

Single lever servo control for 4-position lifting control and 3-position bucket control.

Max flow rate	gpm 40.95
Loader calibration pressure	psi 3,336
Steering calibration pressure	psi 2,538
Lifting jacks	in 3.94x32.09
Bucket jacks	in 4.72x14.96
Lifting time (full)	s 4.6
Lowering time (empty)	s 3.5
Unloading time	s 1.8
Total cycle time	s 9.9



FLUIDS & LUBRICANTS

Engine	gal 2.11
Front differential	gal 4.65
Rear differential	gal 3.14
Reduction gear/adaptor	gal 0.48
Hydraulic circuit	gal 33.81
Brake circuit	gal 0.29
Fuel	gal 40.95
Water radiator	gal 5.28
AdBlue	gal 5.28



TECHNICAL FEATURES

Standard bucket capacity	yd³ 2.35
Bucket width	ft in 7'8.52"
Static tipping load on a horizontal surface	lb 13,669
Static tipping load turned 40°	lb 12,125
Hydraulic lifting capacity at max. height	lb 15,212
Hinge pin height	ft in 12'1.67"
Dump height at 40°	ft in 9'6.17"
Dump distance at 40°	ft in 2'8.09"
Breakout force	lb 18,960





DIMENSIONS & WEIGHTS

Max length in transfer position	ft in 20'0.16"
Max. width in transfer position	ft in 7'8.52"
Tire outer width	ft in 7'2.42"
Tread width	ft in 5'8.9"
Pitch	ft in 8'7.74"
Clear span	in 14.96
Max height	ft in 9'9.32"
Standard operating weight	lb 19,842
Maximum permissible weight	lb 22,289

dB NOISE LEVEL

Noise level inside cabin ISO 6396 - LpA	dB(A) 69
External noise level ISO 6395 - LwA	dB(A) 99

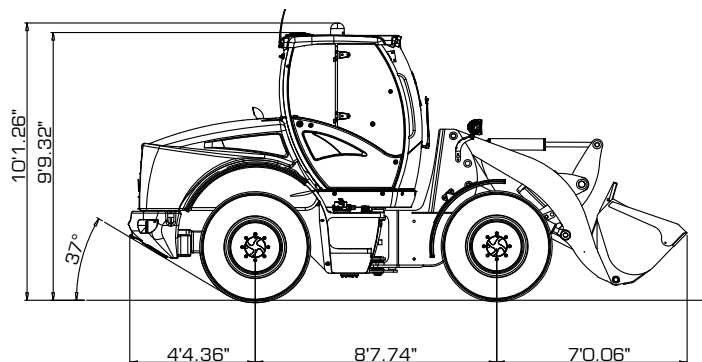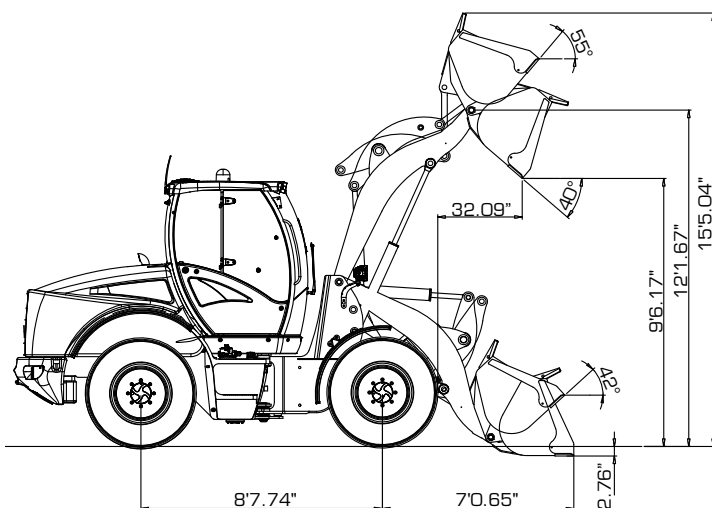

PERFORMANCE DATA


STANDARD

MULTIPURPOSE

OVERSIZE

FORKS

Heaped Bucket Capacity (SAE)	yd ³	2.35	1.7	2.88	/
Bucket width	ft in	7'8.52"	7'8.52"	8'2.43"	/
Bucket weight	lb	1,433	1,653	1,653	/
Max operating height	ft in	15'5.04"	15'2.91"	15'8.82"	/
Fork length (standard)	ft in				3'3.37"
Fork length (optional)	ft in				4'3.18"
Hinge pin height	ft in	12'1.67"	12'1.67"	12'1.67"	/
Dump angle	°	40°	40°	40°	/
Dump height	ft in	9'6.17"	9'8.14"	9'3.54"	/
Dump distance	ft in	2'8.09"	2'7.5"	3'0.38"	/
Static tipping load on a horizontal surface	lb	13,669	13,889	13,228	/
Static tipping load - mach. turned	lb	12,125	12,346	11,684	/
Fork tipping load - mach. turned	lb				10,141
Operating load EN 474-3 (80%) [•]	lb				8,113
Operating load EN 474-3 (60%) [•]	lb				6,085
Breakout force	lb	18,960	21,164	17,196	/
Max length in transfer position	ft in	20'0.16"	19'9.99"	20'3.11"	/
Bucket outer turning radius	ft in	17'8.83"	17'7.85"	18'1.76"	/
Standard operating weight	lb	19,842	20,062	20,062	/

[•] Load center at 19.69"



MOST COMMON OPTIONAL TIRES | OTHER TIRES UPON REQUEST


**500/70 R24
MICHELIN XCML**

Long-life agricultural tire with high traction and high load capacity.

Machine width:
ft in 7'8.56"


**15,5 R25
MICHELIN XTLA**

High traction multi-purpose L2 tire.

Machine width:
ft in 7'2.97"


**15,5 x 25 CAMSO
LOADMASTER L3**

Optimized for multi-surface; high resistance to lateral impact and improved stability.

Machine width:
ft in 6'11.74"


**17,5 R25 AEOLUS
A2233 L5**

L5 tire with compound resistant to cut and impact. Very low puncture risk. Tread designed for exceptional traction and stability.

Machine width:
ft in 7'2.81"


**17,5 R25 MICHELIN
XMINE D2 L5**

Ideal tire for heavy loads, high strength and excellent traction/adhesion compromise.

Machine width:
ft in 7'4.19"


**17,5 R25
NOKIAN GRS**

All-season tire, ideal for winter conditions. Good driving comfort.

Machine width:
ft in 7'2.54"

10.63D

PARALLEL KINEMATICS



DIESEL ENGINE

4 in-line cylinders, supercharged, charge air cooling, electronically controlled, common-rail injection, exhaust gas recirculation, water cooling, dry filtration, oxidation catalyst (DOC) particulate filter (DPF) and selective catalytic reduction (SCR). Issued according to EC Directive 97/68 - Stage V/Tier 4f.

Type	Deutz TCD 3.6 L4
Max. power	105 kW - 143 HP
Calibration (RPM)	2.300
ISO/TR 14396 power	100 kW - 136 HP
EEC 80/1269 power	100 kW - 136 HP
Maximum torque	lbf ft 369
Bore	in 3.86
Stroke	in 4.72
Displacement	in ³ 220.91



ELECTRIC SYSTEM

Battery	12 Volt
Capacity	110 Ah - 850 A
Alternator	95 A
Reverse gear alarm	Standard
Cabling compliant with regulations	IP 67 - DIN 40050



TRANSMISSION

Hydrostatic with electronic power regulation and closed circuit with variable displacement pump and motor.
4 driving modes: Automotive, Work, Eco and Smart Forward Motion*. 2-speed mechanical gearbox with mechanical speed ratio variation (Shift On Fly).

2 Work Speeds	Forward	Reverse
1 st gear mph	0 ÷ 4	0 ÷ 4
2 nd gear mph	0 ÷ 10	0 ÷ 10

2 Transfer Speeds	Forward	Reverse
1 st gear mph	0 ÷ 9	0 ÷ 9
2 nd gear mph	0 ÷ 25**	0 ÷ 25**

* Optional, on request. ** Self-limited maximum speed



AXLES

Heavy Duty axles of the same size with epicyclic final reduction gears on each wheel. Rigid front axle.
Oscillating rear axle with 25° travel.
Distribution of the movement to the two front and rear axles by means of cardan shafts. Automatic self-locking differential on the front axle (optional on the rear).



BRAKING SYSTEM

Service brake: hydraulic multi-disc oil bath on front & rear axles.
Parking brake: negative hydraulic, electrically operated, on the front axle.



TIRES

Standard	17.5 x 25
----------	-----------



STEERING SYSTEM

Power assisted steering by LOAD SENSING power steering.

Steering angle	80°
Tire inner turning radius	ft in 8'11.59"
Tire outer turning radius	ft in 16'1.22"
Bucket outer turning radius*	ft in 18'4.47"

* in transfer position



HYDRAULIC SYSTEM

Comprising two gear pumps, the first for the loader and steering circuit with LOAD SENSING valve, the second for the fan circuit, having a double rotation speed.

Modular 2-section distributor with general valve. Double acting jacks. Hydraulic oil cooling radiator. Full-flow filter on the return circuit. Single lever servo control for 4-position lifting control and 3-position bucket control.

Max flow rate	gpm 40.95
Loader calibration pressure	psi 3,336
Steering calibration pressure	psi 2,538
Lifting jacks	in 4.13x30.31
Bucket jacks	in 3.15x26.77
Lifting time (full)	s 4.6
Lowering time (empty)	s 3.5
Unloading time	s 1.8
Total cycle time	s 9.9



FLUIDS & LUBRICANTS

Engine	gal 2.11
Front differential	gal 4.65
Rear differential	gal 3.14
Reduction gear/adaptor	gal 0.48
Hydraulic circuit	gal 33.81
Brake circuit	gal 0.29
Fuel	gal 40.95
Water radiator	gal 5.28
AdBlue	gal 5.28



TECHNICAL FEATURES

Standard bucket capacity	yd ³ 2.35
Bucket width	ft in 7'8.52"
Static tipping load on a horizontal surface	lb 12,787
Static tipping load turned 40°	lb 11,464
Hydraulic lifting capacity at max. height	lb 21,826
Hinge pin height	ft in 12'5.61"
Dump height at 40°	ft in 9'4.2"
Dump distance at 40°	ft in 3'7.31"
Breakout force	lb 17,637





DIMENSIONS & WEIGHTS

Max length in transfer position	ft in 20'5.28"
Max. width in transfer position	ft in 7'8.52"
Tire outer width	ft in 7'2.42"
Tread width	ft in 5'8.9"
Pitch	ft in 8'7.74"
Clear span	in 14.96
Max height	ft in 9'9.32"
Standard operating weight	lb 20,944
Maximum permissible weight	lb 22,289



NOISE LEVEL

Noise level inside cabin ISO 6396 - LpA	dB(A) 69
External noise level ISO 6395 - LwA	dB(A) 99

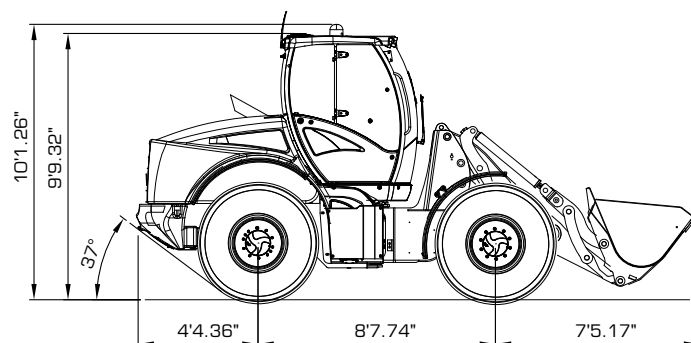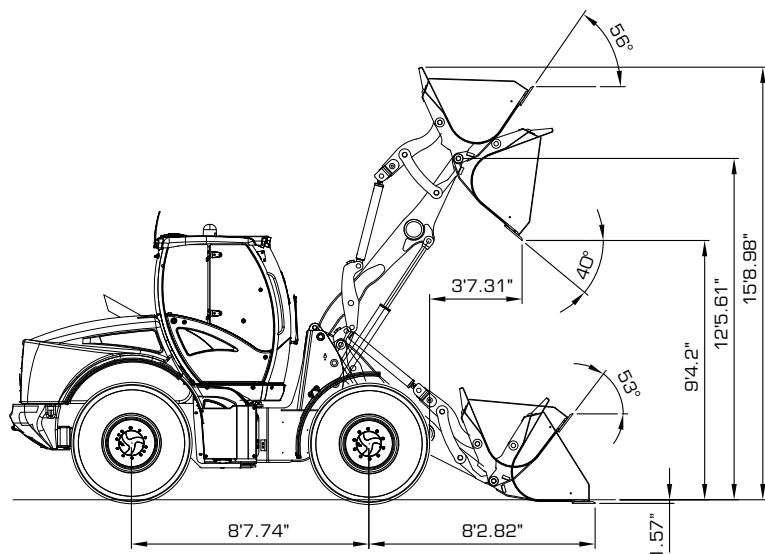
STANDARD

MULTIPURPOSE

OVERSIZE

FORKS

PERFORMANCE DATA

Heaped Bucket Capacity (SAE)	yd ³	2.35	1.7	2.88	/
Bucket width	ft in	7'8.52"	7'8.52"	8'2.43"	/
Bucket weight	lb	1,433	1,653	1,653	/
Max operating height	ft in	15'8.98"	15'11.1"	16'1.9"	/
Fork length (standard)	ft in				3'3.37"
Fork length (optional)	ft in				4'3.18"
Hinge pin height	ft in	12'5.61"	12'5.61"	12'5.61"	/
Dump angle	°	40°	40°	40°	/
Dump height	ft in	9'4.2"	9'6.17"	9'4.48"	/
Dump distance	ft in	3'7.31"	3'6.72"	3'7.03"	/
Static tipping load on a horizontal surface	lb	12,787	13,007	12,346	/
Static tipping load - mach. turned	lb	11,464	11,684	10,803	/
Fork tipping load - mach. turned	lb				9,259
Operating load EN 474-3 (80%) [•]	lb				7,496
Operating load EN 474-3 (60%) [•]	lb				5,512
Breakout force	lb	17,637	19,842	17,805	/
Max length in transfer position	ft in	20'5.28"	20'3.11"	20'8.23"	/
Bucket outer turning radius	ft in	18'4.47"	18'3.49"	18'9.43"	/
Standard operating weight	lb	14,330	21,164	21,164	/

[•] Load center at: 19.69"



MOST COMMON OPTIONAL TIRES | OTHER TIRES UPON REQUEST


**17,5 x 25
MIITAS EM60**

Tread designed for heavy duty use on construction sites and combined conditions. Excellent self-cleaning properties.

Machine width:
ft in 7'2.42"


**500/70 R24
MICHELIN XCML**

Long-life agricultural tire with high traction and high load capacity.

Machine width:
ft in 7'8.56"


**15,5 R25
MICHELIN XTLa**

High traction multi-purpose L2 tire.

Machine width:
ft in 7'2.97"


**15,5 x 25 CAMSO
LOADMASTER L3**

Tire optimized for multi-surface use; high resistance to lateral impact and improved stability.

Machine width:
ft in 6'11.74"


**17,5 R25 AEOLUS
A2233 L5**

L5 tire, cut- and impact-resistant compound. Minimal puncture risk. Tread designed for exceptional traction and stability.

Machine width:
ft in 7'2.81"


**17,5 R25 MICHELIN
XMINE D2 L5**

Ideal tire for heavy loads, high strength and excellent traction/adhesion compromise.

Machine width:
ft in 7'4.19"


**17,5 R25
NOKIAN GRS**

All-season tire, ideal for winter conditions. Good driving comfort.

Machine width: ft in
ft in 7'2.54"



www.vf-venieri.com



vf_venieri



vfvenieri



vfvenieri



YouTube

VF Venieri



vf-venieri-spa



The illustrations on the present folder do not necessarily show the product standard version. Data and dimensions described in this folder are not binding. Venieri reserves the right of carrying out possible changes at any time and without previous notice because of its policy of steady development and improvement of the products.

UP763D_963D_863CHL_10.63C_A-US (2023)



VENIERI SPA
EARTHMOVING MACHINES

Via Piratello, 106 - 48022 Lugo (RA) - ITALY
Tel. +39 0545 904411 Fax +39 0545 30389
e-mail: info@vf-venieri.com | www.vf-venieri.com

SPARE PARTS

Tel. +39 0545 904429 Fax +39 0545 24555
e-mail: ricambi@vf-venieri.com