Venieri SPA

HIGH EFFICIENCY / HE

7.63D
8.63C
9.63D
10.63D
WHEEL LOADERS



7.63D
9.63D

BUILDING, CONSTRUCTION AND INDUSTRY



KINEMATICS 4K

Latest generation kinematics, completely redesigned to guarantee maximum breakout force.

BREATHTAKING VIEW

The new ROPS/FOPS Level II certified cabin guarantees 360° visibility, allowing total visual control over any equipment installed.

SAFETY IS OUR PRIORITY

The front axle internally integrates the negative/automatic parking brake for maximum safety in every operating situation.

STAY COOL

The new ventilation system guarantees maximum comfort to the operator. You can choose between automatic climate control or air conditioning, thus obtaining the perfect temperature in the cabin.

CLEAN AIR AT ALL TIMES

Engine air filtration takes place via the main cartridge, safety cartridge and cyclone pre-filtration.

100% VENIERI DESIGN

Maximum attention by the Venieri Style Center in preserving a “family feeling”, despite the introduction of an engine with substantially larger dimensions than the previous Stage IIIB.

SILENT OPERATION

The commitment of Venieri’s R&D in terms of noise reduction has resulted in a decrease of noise pollution below 70 dB; this value was certified on previous models and guarantees the operator maximum operating comfort.

VENIERI DASH CONTROL

With the color electronic dash control the operator will be able to easily manage the electronic transmission, the available options and the reading of the transmission pressure.



TIER 4f

DEUTZ TIER 4f ENGINE

New Deutz engine, compliant with the latest anti-pollution regulations with high torque already at low rpm. Substantial increase in power up to 21% and torque up to 17%, compared to previous models.

TOTAL STABILITY

All new Venieri loaders are equipped with an oscillating rear axle supported by maintenance-free supports.

"SHIFT ON FLY" MECHANICAL GEARBOX

2-speed mechanical gearbox, with variation of the mechanical speed ratio and electronic shifting management (On VF 9.63D. On VF 7.63D the gear change is synchronized from standstill).

AGILE BY VOCATION AND DESIGN

The particular design of the counterweight has been studied to obtain extremely high angles of operation, protect the LED street lights, ensure maximum maneuverability in tight spaces and prevent the ground from sticking when operating off-road.

DOUBLE SPEED

DOUBLE ATTENTION FOR SAVINGS

Electrically controlled and hydraulically operated double speed cooling fan.
Rotation speed according to working conditions: reduced fuel consumption and low noise.

Venieri GLOBAL

VENIERI GLOBAL

Being connected is no longer optional for us. Thanks to the (standard) integrated Venieri Global system, the new Venieri loaders and your Smartphone become one. (Venieri Global annual subscription not included).

SMART FORWARD MOTION

Specific driving mode for the use of equipment that requires maximum oil flow combined with the possibility of low-speed transfers. Manageable transfer either by using the Venieri Dash Control or directly from the pedal, allowing the operator full control of vehicle and equipment, without ever taking his hands off the steering wheel.

8.63C
10.63D

BORN FOR AGRICULTURAL USE



PARALLEL KINEMATICS

Latest generation kinematics, which guarantees parallel operation with the forks along the entire arm movement range.

SAFETY IS OUR PRIORITY

The front axle internally integrates the negative/automatic parking brake for maximum safety in every operating situation.

CLEAN AIR AT ALL TIMES

Engine air filtration takes place via the main cartridge, safety cartridge and cyclone pre-filtration.

SILENT OPERATION

The commitment of Venieri's R&D in terms of noise reduction has resulted in a decrease of noise pollution below 70 dB; this value was certified on previous models and guarantees the operator maximum operating comfort.

BREATHTAKING VIEW

The new ROPS/FOPS Level II certified cabin guarantees 360° visibility, allowing total visual control even if equipped with an extended parallel arm.

STAY COOL

The new ventilation system guarantees maximum comfort to the operator. You can choose between automatic climate control or air conditioning, thus obtaining the perfect temperature in the cabin.

100% VENIERI DESIGN

Maximum attention by the Venieri Style Center in preserving a "family feeling", despite the introduction of an engine with substantially larger dimensions than the previous Stage IIIB.

VENIERI DASH CONTROL

With the color electronic dash control, the operator will be able to easily manage the electronic transmission and the available options, and read the transmission pressure.



TIER 4f

DEUTZ TIER 4f ENGINE

New Deutz engine, compliant with the latest anti-pollution regulations with high torque already at low rpm. Substantial increase in power up to 21% and torque up to 17%, compared to previous models.

TOTAL STABILITY

All new Venieri loaders are equipped with an oscillating rear axle supported by maintenance-free supports.

TIRES FOR EVERY APPLICATION

Wide range of versatile agricultural tires of different sizes, depending on the type of terrain and use.

AGILE BY VOCATION AND DESIGN

The particular design of the counterweight has been studied to obtain extremely high angles of operation, protect the LED road lights, ensure maximum maneuverability in tight spaces and prevent the ground from sticking when operating off-road.

"SHIFT ON FLY" MECHANICAL GEARBOX

2-speed mechanical gearbox, with variation of the mechanical speed ratio and electronic shifting management (On VF 10.63D. On VF 8.63C the gear change is synchronized from standstill).

DOUBLE ATTENTION FOR SAVINGS

DOUBLE SPEED

Electrically controlled and hydraulically operated double speed cooling fan. Rotation speed according to working conditions: reduced fuel consumption and low noise. Reversible fan kit available (optional).

VENIERI GLOBAL

Venieri GLOBAL

Being connected is no longer optional for us. Thanks to the (standard) integrated Venieri Global system, the new Venieri loaders and your Smartphone become one.
(Venieri Global annual subscription not included).

SMART FORWARD MOTION

Specific driving mode for the use of equipment that requires high oil flow combined with low-speed transfers. Manageable transfer via the Venieri Dash Control or directly from the pedal, allowing the operator full control of vehicle and equipment, without ever taking his hands off the steering wheel.

THE CABIN

A BREATHTAKING VIEW.


Take a seat in your customized control room. Create your ideal work space by adjusting the pneumatic seat and the steering wheel to suit your specific needs. Select the commands, all at your fingertips. The excellent all-round visibility in which “blind spots” have been reduced to a minimum, offers the optimal view to work with maximum efficiency, allowing total visual and operational control over any installed equipment.






STAY COOL. AT ALL TIMES.

All the ventilation system (with 9 delivery points) has been completely redesigned for alignment to ISO10263 standards, and ensures easy maintenance of the heating and A/C unit, which can be completely tilted out of its housing.
Using a single dashboard, the operator can select the ideal temperature, thus achieving maximum working comfort.
All the Venieri wheel loaders can be equipped with Venieri Climatronic (optional): you set the temperature… and it will take care of the rest!

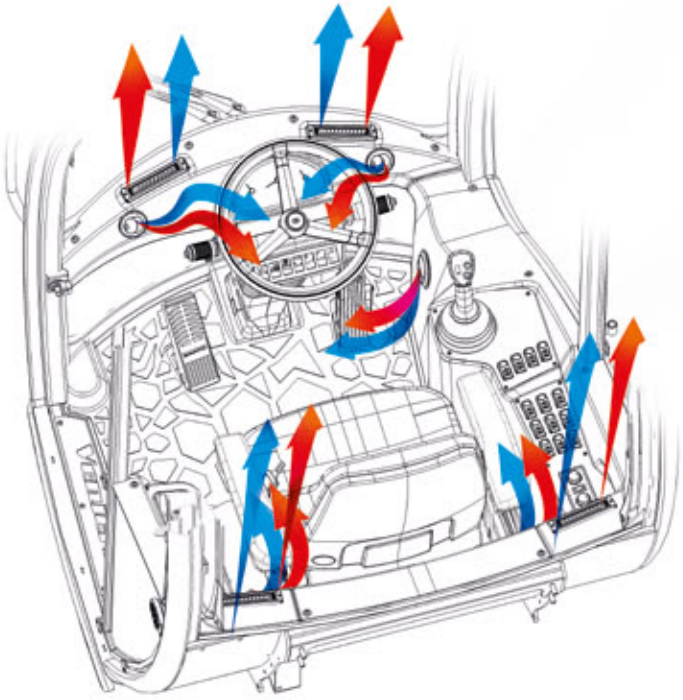

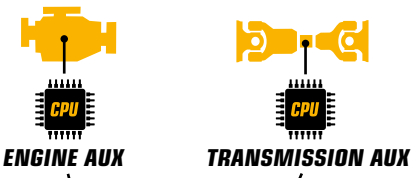



BLACK BOX EASY ACCESS

IT'S ALL HERE.

For the first time on a Venieri cabin, all the electronic components have been installed in a watertight box located in the cab frame, and accessible only from inside the passenger compartment; it is easy to access and complete with all the sockets required to perform diagnostics.

OPEN SESAME.

The double-opening door allows the operator to work with the access door closed, but with the upper glass open, thus ensuring maximum ventilation even when the A/C system is off and without protruding parts.




BEAUTY MEETS FUNCTIONALITY AT LAST.

In designing the cabin of the new wheel loaders, the Venieri Style Center tried to blend functionality and style, with the goal of manufacturing top-of-the-line machinery in terms of comfort and ergonomics. The new interior design has also made it possible to obtain various storage areas, which are very useful for storing small work tools, mobile phones, drinks and more.





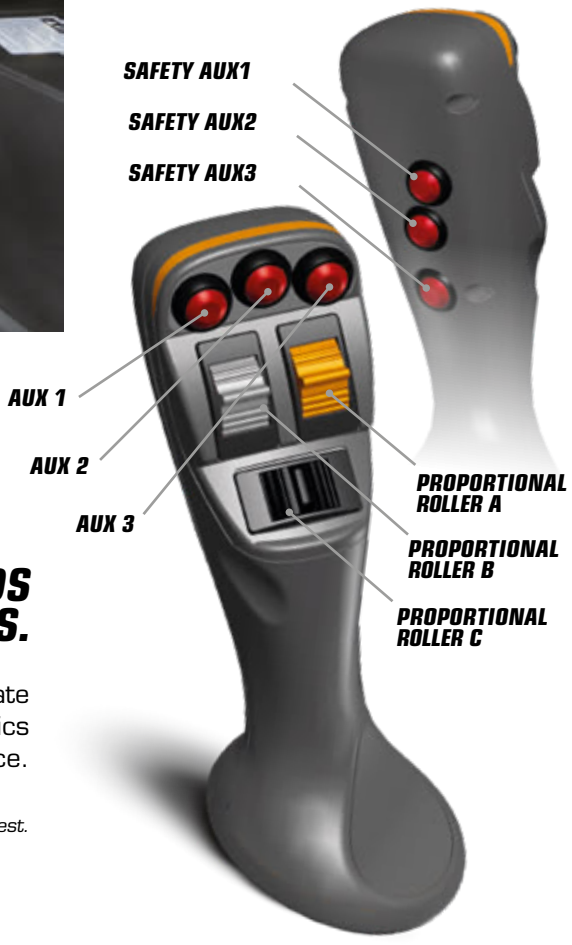

POWER AND COMMANDS AT YOUR FINGERTIPS.

The mono-joystick* represents the ultimate in all-in-one technology: ergonomics and functionality at the operator's service.

** Optional, available on request.*

THE TRANSMISSION

HE A NEW VISION OF HYDROSTATIC EFFICIENCY

The increasingly stringent limits for exhaust emissions will continue to represent an ever-increasing challenge for the further technical development of mobile work machines. In addition, machine operators require increasingly greater efficiency and productivity.
The interconnection between electronic and hydraulic parts is essential in reducing fuel consumption and exhaust emissions, while also increasing the operating performance of the machine.
As a result, the extraordinary evolution of electronics applied to hydraulic power guarantees greater flexibility and a targeted response to address every different operational need more effectively.



SHIFT ON FLY. IT NEVER STOPS.

Mobile machines to support the speeds required in road travel are generally equipped with hydrostatic transmission and a gearbox that can be synchronized or automatic. In the first case (synchronized), the change from working gear to transfer is performed while stationary, while in the second case (SoF = automatic) the change takes place in motion.
The Dana-Rexroth transmission with electronically controlled hydrostatic pump and motor and a 367 SOF - Shift On Fly gearbox, also electronically operated, offers new opportunities for road driving, especially for wheel loaders.It allows the operator to operate at low speed with high traction forces, and later, during the transfer, change the mechanical ratio in torque, without stopping the machine, to reach a maximum speed of 25 mph (self-limited).



- **GREATER EFFICIENCY: HIGH TRACTION FORCE AND MAXIMUM TRANSFER SPEED**
- **HIGH COMFORT: FAST AND SYNCHRONIZED GEAR CHANGES WITHOUT INTERRUPTIONS**
- **VERY HIGH RELIABILITY SERIES COMPONENTS**
- **MEETS FUNCTIONAL SAFETY REQUIREMENTS**
- **COMPACT DIMENSIONS, REDUCED INSTALLATION SPACE**

BENEFITS



Dana Rexroth
Transmission Systems

METHOD OF USE

3 different driving modes are available, each with different characteristics to always guarantee maximum operational efficiency.

- ECO
- WORK
- AUTOMOTIVE

CONTROL MODE

Essential for use with attachments, these modes allow adjusting the machine's forward motion (by power meter or pedal) with all the hydraulic power available for the attachment.

- POWER & SPEED
- CREEP
- CREEP MODE *PLUS*

ELECTRONIC DASHBOARD

Control the main functions of the machine with a finger. "DASH" digital panel necessary to select ALL the machine transmission modes and settings.

- INTUITIVE CONTROLS
- EASY TO USE
- REAL TIME DIAGNOSTIC

HIGH EFFICIENCY / HE







SAFETY ON BOARD

Several safety controls operated by the Rexroth control unit allow the user to operate in total safety, with maximum efficiency and without the risk of machine downtime.

AUTO CHECK SELF DIAGNOSIS


ELECTRONIC TRANSMISSION MANAGEMENT

It guarantees an optimized distribution of the available power to reduce consumption and increase performance.

AI ARTIFICIAL INTELLIGENCE

INTERCONNECTED MACHINE

A machine totally interconnected and controlled entirely in the Cloud.
Welcome to the future.

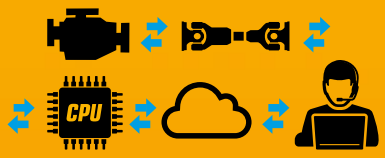

- PREDICTIVE MAINTENANCE
- REAL-TIME DATA & DIAGNOSIS
- SELF-LEARNING
- MACHINE IN CLOUD







VENIERI 4.0 *(OPTIONAL)*

The VENIERI DASH CONTROL electronic Dashboard allows the operator to manage and view some of the most important functions of the machine with utmost ease and efficiency.

ECO MODE


ECO mode control screen, for a "softer" setting of the transmission response curve and limitation on engine RPM at max 1700 RPM





SMART FORWARD MOTION

Essential for use with attachments, these modes allow adjusting the machine's forward motion (by power meter or pedal) with all the hydraulic power available for the attachment.

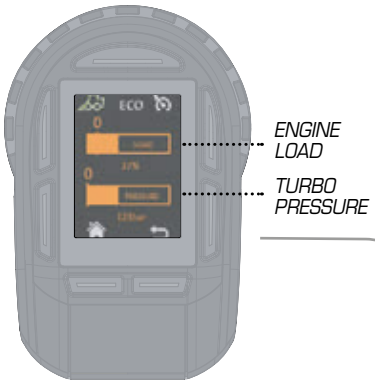

AUTOMOTIVE

AUTOMOTIVE mode control screen, in which we have an average setting of the transmission response curve and all available engine revolutions



WORK

WORK mode control screen, in which we have the inhibition of the shifting, first gear from 9 mph instead of 6 mph and setting for the response curve of the more "aggressive" transmission





DIAGNOSTIC

Screen for checking diagnostic errors and pressures.



MANUAL ACCELERATOR

Engine RPM display and control screen for use with attachments

Venieri DASH CONTROL

The screens shown on this page are for VF 9.63D and VF 10.63D.




ECO


Venieri


Venieri

ALL-SEASONS MACHINE.

The multifunction properties of the new loaders is achieved with the single multifunction connection plate, an essential implementation to make them a universal tool carrier.











SILENCE IS A VIRTUE.

The noise level of the new loader is simply extraordinary. With only 69dB of internal noise in the cabin, you will not even realize that you are working; you can also use very convenient options, such as the Bluetooth™ hands-free kit with maximum effectiveness.



VROOOOOOOOOM!

Driving speed 25 mph*, self-limited. On the other hand, Venieri is based in the heart of the Italian Motor Valley and... the speed of our machines cannot be an option!


POWER AND EFFICIENCY WHERE YOU NEED THEM MOST.

A lot of power for the hydraulic system and, at the same time, a reduction in travel speed.
For these reasons the new Venieri wheel loaders need a single pedal. The brake pedal with inching function can control both the mechanical and the hydraulic (inching) brake.
Obvious advantages are less wear on the service brake and optimal distribution of engine power.





NO PRESSURE
on the inching/brake pedal: maximum power for traction.



NORMAL PRESSURE
on the inching/brake pedal: speed reduction, more power in the service hydraulic system.



MAX PRESSURE
on the inching/brake pedal: the wheel loader stops, maximum strength to the hydraulic system

THE ENGINE

MAXIMUM POWER, ECO FRIENDLY ENGINE.

The new Venieri loaders are fitted with a DEUTZ TCD 3.6 L4 motor, which is a compact 4-cylinder in-line and water-cooled motor, for industrial and agricultural machinery, with a maximum power of 143 HP and aligned with EU and United States EPA Tier 4f requirements.
Externally cooled turbocharged engine with intercooler and exhaust gas recirculation. 100% of the power available on flywheel and front.
Up to two hydraulic drives can be installed on the PTO, with a total torque of up to 229 ft·lbf.

EXHAUST GAS MANAGEMENT


The exhaust gas management on this engine is DOC/DPF + SCR.
DOC (Diesel Oxidation Catalyst) is a catalyst that reacts by contact with the engine exhaust gases, transforming its main components into substances that are not harmful to the environment.
The DPF (Diesel Particulate Filter) is a DEUTZ diesel particulate filter, coated with noble metals and adapted to the installation needs of the individual customer application, which supports regular, safe and continuous regeneration, without the need for regular maintenance or additional operating fluids. The use of reliable turbocharger technology, especially compared to SCR-based EAT systems only, enables optimum engine performance throughout the entire rev range.
A surface temperature of max. 250°C provides additional safety during operation.
The SCR (Selective Catalytic Reduction) is a method for reducing NOx emissions. The basis of this technology is a 32.5% liquid urea solution, which is sprayed into the exhaust duct by a dedicated vanadium- or zeolite-coated catalyst. Urea produces ammonia (NH3) in a passive transformation which reacts with NOx and oxygen to form nitrogen and water.

- **MINIMUM CONSUMPTION OF OPERATING LIQUIDS VERSUS THE COMPETITION**
- **500 HOUR MAINTENANCE INTERVAL TO REGENERATE SULFUR DEPOSITS AND ADBLUE CRYSTALLIZATION**
- **TECHNICAL SUPPORT AND DIAGNOSIS PROVIDED BY DEUTZ'S WORLDWIDE SERVICE NETWORK**

BENEFITS

ADVANCED TECHNOLOGY FOR EXHAUST GAS RECOVERY

TECHNICAL OVERVIEW OF THE TIER 4 FINAL CONCEPT

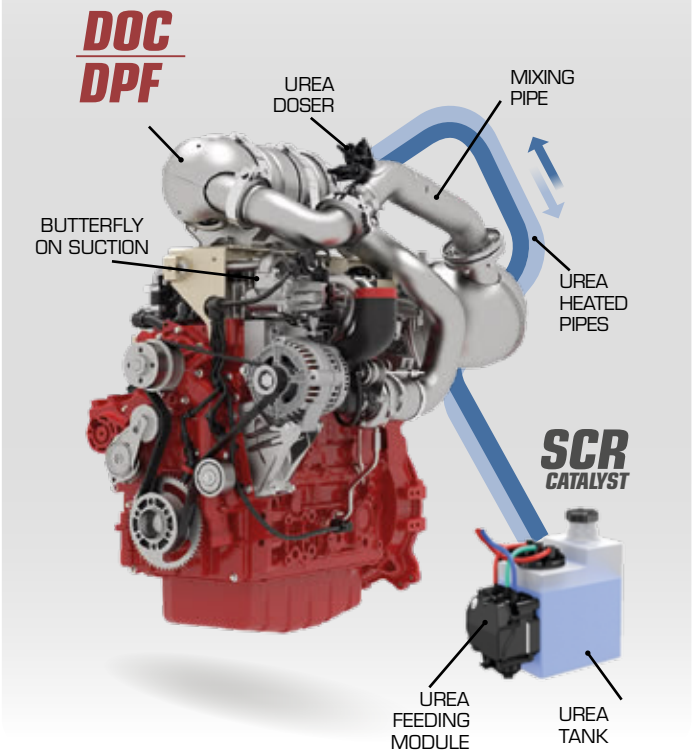


ENGINE MANAGEMENT

Engines equipped with DEUTZ Common Rail® injection communicate with the machine via a CAN-Bus protocol. This allows functions such as drive-by-wire and full engine control to be integrated into electronically controlled hydrostatic thrusters.
The automatic electronic control also guarantees the integrated engine diagnosis and safety system. If the controller registers an abnormal motor status, as in the case of overheating, engine performance is reduced to emergency mode until it shuts down. This minimizes costly repairs, reduces equipment downtime and increases operational reliability.


COMMON RAIL

The powerful Common Rail® injection system and the Electronic Engine Control (EMR) with smart connection to engine management ensure optimum engine performance with low fuel consumption.

DEUTZ TCD 3.6 L4 - ***100kW*** **9.63D | 10.63D**

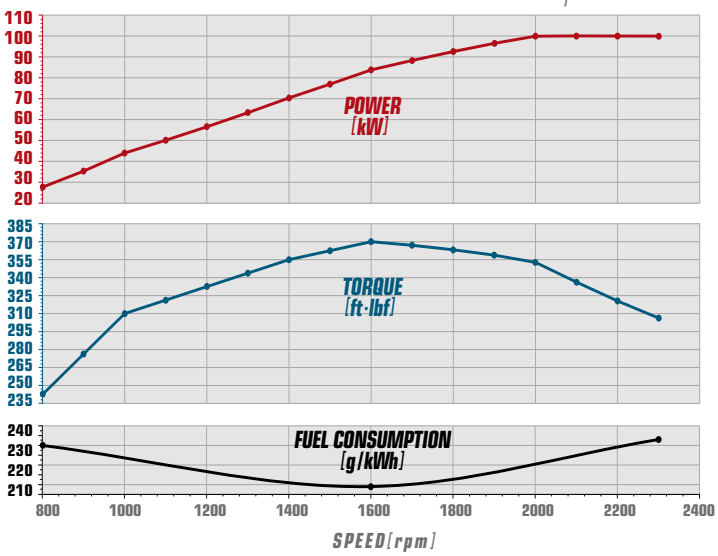


DEUTZ TCD 3.6 L4 - ***90kW*** **7.63D | 8.63C**

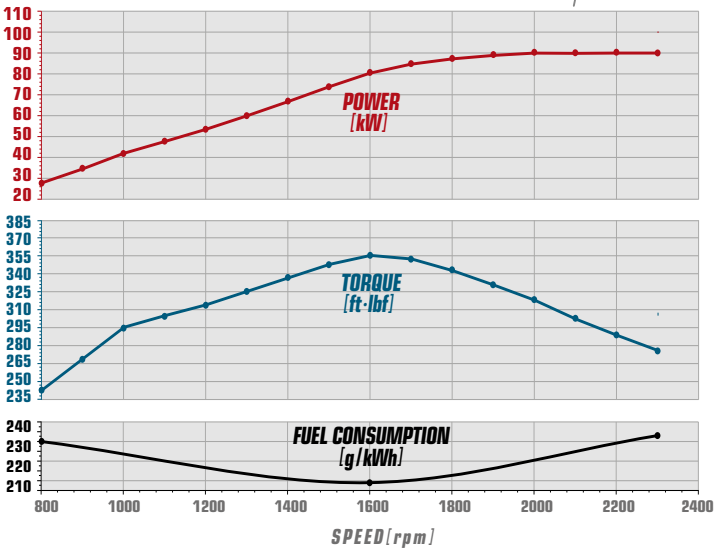


EVOLUTION IN PERFORMANCE

Performance step-up guaranteed by the technological evolution of the brand new Deutz engine that is installed in the new Venieri loaders is evident in every area of use when compared to the previous generation of wheel loaders. And always with the utmost respect for the environment and consumption.


POWER

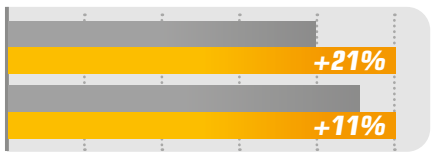


eco mode FUEL CONSUMPTION

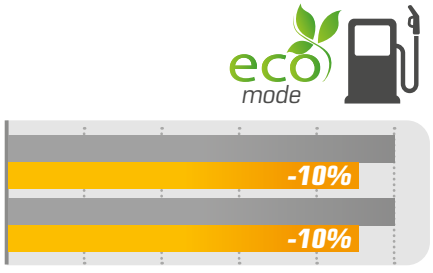


UPHILL SPEED POWER

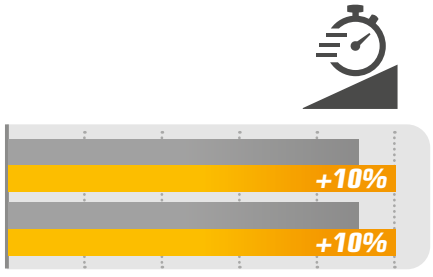

PTO

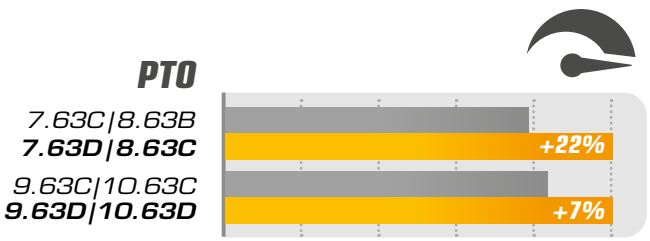

CABIN INTERNAL NOISE

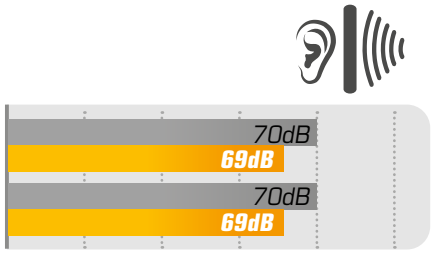

Venieri GLOBAL

CONTROL YOUR FLEET


Venieri GLOBAL™ *is our brand-new satellite monitoring system, which guarantees an increase in productivity by providing detailed information about the fleet and attachments, as well as an incredible amount of data to ensure the highest performance levels and greater economic efficiency.*

AVAILABLE FEATURES

Machine localisation	✓
Alerts history	✓
Maintenance plan	✓
Maintenance history	✓
Load information	✓
Working hours	✓
Security control (engine block)	O
Fuel consumption (total and partial)	✓
Fuel consumption while working	✓
Machine efficiency (while working)	✓
Detailed working hours	✓
Motion sensor alarm	✓
Curfew alarm setting	✓

Work shifts alarm	✓
Standard operating procedure history	O
Energy-saving guidelines history	O
Location log (map with locations and operating procedures)	✓
Information about diesel particulate filter	✓
Geo-fencing	✓
Localisation and managment fleet	✓
Multiuser control with specific access policies	✓
List of “sleeping” machines	✓
Sms/e-mail notification	✓
Anti-theft alarm	X
Parameters setting upon request	O

✓ Standad O Optional X Not available

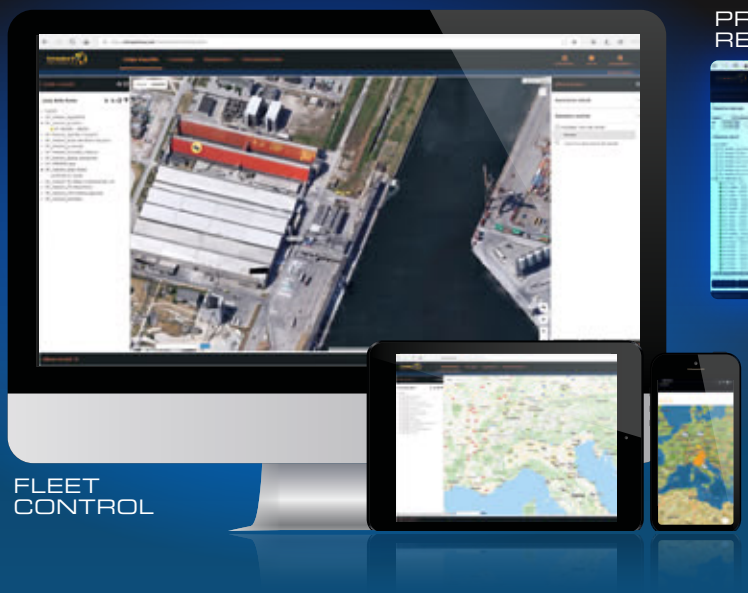





MACHINE EQUIPMENT

	7.63D	8.63C	9.63D	10.63D
Battery switch	✓	✓	✓	✓
Maintenance tool set	✓	✓	✓	✓
Diesel preheating for cold start	O	O	O	O
Cap with key for fuel tank	✓	✓	✓	✓
Self-locking proportional differential on the front axle	✓	✓	✓	✓
Self-locking proportional differential on the rear axle	O	O	O	O
Differential with 100% locking on the front axle	O	O	O	O
Tow hook	✓	✓	✓	✓
Rotating lamp	✓	✓	✓	✓
Soundproofing	✓	✓	✓	✓
Spare parts catalogue	✓	✓	✓	✓
Use and maintenance manual	✓	✓	✓	✓
Type approval for operation on roads	✓	✓	✓	✓
Arm and bucket lock safety device	✓	✓	✓	✓
Device for bucket positioning parallel to the ground	✓	✓	✓	✓
CREEP mode	O	O	O	O
CREEP mode Plus	O	O	O	O
Venieri GLOBAL satellite monitoring (Annual subscription not included)	✓	✓	✓	✓
Double-speed hydraulic fan	✓	✓	✓	✓
Reversible fan for radiator cleaning	O	O	O	O
Negative parking brake	✓	✓	✓	✓
Service brake on both decks with separate circuits	✓	✓	✓	✓
Inch pedal integrated on the brake pedal	✓	✓	✓	✓
Greasing points grouped on frames	✓	✓	✓	✓
Automatic centralized greasing	O	O	O	O
Ride control	O	O	O	O
Water preheating system	O	O	O	O
Hydraulic oil preheating system	O	O	O	O
Biodegradable hydraulic oil	O	O	O	O
ISO 46 hydraulic oil (cold climates) (On request in Italy)	✓	✓	✓	✓
Vortex prefilter	✓	✓	✓	✓
LED rear lights	✓	✓	✓	✓
Electronically controlled hydrostatic transmission with 2 modes of use (Automotive and ECO)	✓	✓	X	X
Electronically controlled hydrostatic transmission with 3 modes of use (Automotive, Work and ECO)	X	X	✓	✓
Gearbox with 2 mechanical gears and synchronizer (gearbox from standstill)	✓	✓	X	X
Gearbox with 2 mechanical Shift on Fly ratios selectable on the go	X	X	✓	✓



CABIN EQUIPMENT

ROPS/FOPS Level II, pressurized and soundproofed cabin	✓	✓	✓	✓
Front and rear windshield wipers with washer	✓	✓	✓	✓
Halogen work lights (4 front + 2 rear)	✓	✓	✓	✓
Work LED lights (4 front + 2 rear)	O	O	O	O
Mobile phone compartment	✓	✓	✓	✓
Bottle holder	✓	✓	✓	✓
Document compartment	✓	✓	✓	✓
Seat with mechanical suspension	✓	✓	✓	✓
Seat with pneumatic suspension	O	O	O	O
Seat with pneumatic suspension and heating	O	O	O	O
Armrests on seat	✓	✓	✓	✓
Buzzer	✓	✓	✓	✓
Cabin carpet	✓	✓	✓	✓
Clothes hangers	✓	✓	✓	✓
radio wiring	✓	✓	✓	✓
Additional 12V socket	✓	✓	✓	✓
“Manual” air conditioning	O	O	✓	✓
“Climatronic Venieri” automatic climate system	O	O	O	O
Internal courtesy light	✓	✓	✓	✓
Sunblind	✓	✓	✓	✓
Rear-view mirrors	✓	✓	✓	✓
Heated rear-view mirrors	O	O	O	O
First-aid kit	O	O	O	O
2 kg fire extinguisher	O	O	O	O
Safety seat belt	✓	✓	✓	✓
Instrumentation and dashboard complete with LCD display	✓	✓	✓	✓
Venieri Dash Control	✓	✓	✓	✓
Glass breaker hammer	✓	✓	✓	✓



EQUIPMENT

Hydraulic or mechanical quick coupler	O	O	O	O
Mixing bucket	O	O	O	O
4-in-1 multipurpose bucket	O	O	O	O
Universal lifting forks	O	O	O	O
Asphalt/concrete planner	O	O	O	O
Snow blower	O	O	O	O
Snow blade or "V" blade	O	O	O	O
Angle-tilt dozer	O	O	O	O
Hand hammer	O	O	O	O
Sweeper	O	O	O	O
Trencher	O	O	O	O
High-tip bucket	O	O	O	O
High-flow system	O	O	O	O
Unpressurized return line	O	O	O	O
Double auxiliary system	O	O	O	O
Rear hydraulic outlets (single effect)	O	O	O	O

NOTE - standard configuration may vary from market to market: please, always verify with the dealer.

✓ Standard O Optional X Not available

Z.63D

Z KINEMATICS

DIESEL ENGINE

4 in-line cylinders, supercharged, charge air cooling, electronically controlled, common-rail injection, exhaust gas recirculation, water cooling, dry filtration, oxidation catalyst (DOC) particulate filter (DPF) and selective catalytic reduction (SCR). Issued according to EC Directive 97/68 - Tier 4f.

Type		Deutz TCD 3.6 L4
Max. power		94,5 kW - 128 HP
Calibration (RPM)		2.300
ISO/TR 14396 power		90 kW - 122 HP
EEC 80/1269 power		90 kW - 122 HP
Maximum torque	lbf ft	354
Bore	in	3.86
Stroke	in	4.72
Displacement	in^3	220.91

ELECTRIC SYSTEM

Battery	12 Volt
Capacity	110 Ah - 850 A
Alternator	95 A
Reverse gear alarm	Standard
Cabling compliant with regulations	IP 67 - DIN 40050

TRANSMISSION

Hydrostatic with electronic power regulation and closed circuit with variable displacement pump and motor. 3 driving modes: Automotive, Eco and Smart Forward Motion*. 2-speed mechanical gearbox with synchronizer (gear change from standstill).

2 Work Speeds	*Forward*	*Reverse*
1st gear mph	0 ÷ 4	0÷4
2nd gear mph	0 ÷ 8	0 ÷ 8

2 Transfer Speeds	*Forward*	*Reverse*
1st gear mph	0 ÷11	0 ÷11
2nd gear mph	0 ÷25**	0 ÷25**

** Optional, on request.* *** Self-limited maximum speed*

AXLES

Heavy Duty axles of the same size with epicyclic final reduction gears on each wheel. Rigid front axle. Oscillating rear axle with 25° travel. Distribution of the movement to the two front and rear axles by means of cardan shafts. Automatic self-locking differential on the front axle (optional on the rear)

BRAKING SYSTEM

Service brake: hydraulic multi-disc oil bath on front & rear axles. Parking brake: negative hydraulic, electrically operated, on the front axle.

TIRES

Standard	15.5 x 25

STEERING SYSTEM

Power assisted steering by LOAD SENSING power steering.

Steering angle		80°
Tire inner turning radius	ft in	8'10.42"
Tire outer turning radius	ft in	15'7.24"
Bucket outer turning radius*	ft in	17'3.48"

** in transfer position*

HYDRAULIC SYSTEM

Comprising two gear pumps, the first for the loader and steering circuit with LOAD SENSING valve, the second for the fan circuit, having a double rotation speed. Modular 2-section distributor with general valve. Double acting jacks. Hydraulic oil cooling radiator. Full-flow filter on the return circuit.
Single lever servo control for 4-position lifting control and 3-position bucket control.

Max flow rate	gpm	27.74
Flow rate with high-flow kit (optional)	gpm	34.34
Loader calibration pressure	psi	3,626
Steering calibration pressure	psi	2,538
Lifting jacks	in	3.35x32.56
Bucket jacks	in	3.94x14.96
Lifting time (full)	s	5.1
Lowering time (empty)	s	3.1
Unloading time	s	1.2
Total cycle time	s	9.4

FLUIDS & LUBRICANTS

Engine	gal	2.11
Front differential	gal	2.43
Rear differential	gal	2.4
Reduction gear/adapter	gal	0.48
Hydraulic circuit	gal	33.81
Brake circuit	gal	0.24
Fuel	gal	36.98
Water radiator	gal	5.28
AdBlue	gal	5.28

TECHNICAL FEATURES

Standard bucket capacity	yd^3	1.83
Bucket width	ft in	7'4.58"
Static tipping load on a horizontal surface	lb	12,346
Static tipping load turned 40°	lb	11,023
Hydraulic lifting capacity at max. height	lb	12,346
Hinge pin height	ft in	11'10.32" *(11'8.35")**
Dump height at 40°	ft in	9'5.78" *(9'3.81")**
Dump distance at 40°	in	33.27 *(35.24)**
Breakout force	lb	20,063

** (...) With optional 405/70 R24 tires*


DIMENSIONS & WEIGHTS


Max length in transfer position	ft in	19'4.28"
Max. width in transfer position	ft in	7'4.58"
Tire outer width	ft in	6'11.35"
Tread width	ft in	5'7.32"
Pitch	ft in	8'4.79"
Clear span	in	11.02 *(9.06)**
Max height	ft in	9'7.67" *(9'5.7")**
Standard operating weight	lb	17,328 *(16,755)**
Maximum weight	lb	19,290

** (...) With optional 405/70 R24 tires*

NOISE LEVEL

Noise level inside cabin ISO 6396 – LpA	dB(A)	69
External noise level ISO 6395 - LwA	dB(A)	101

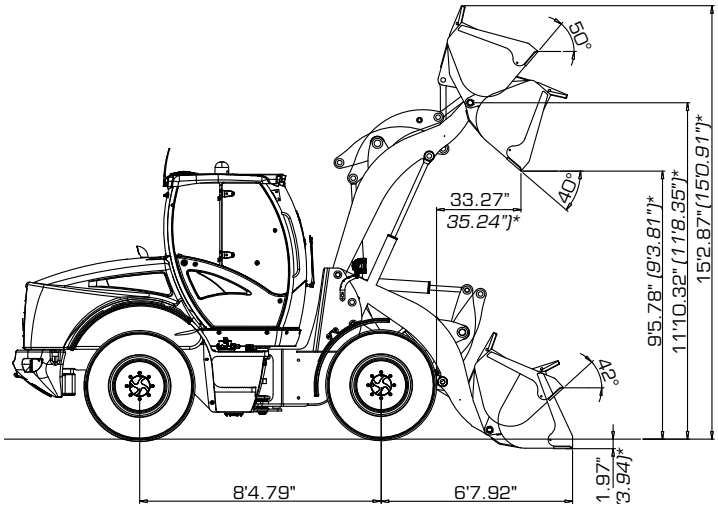

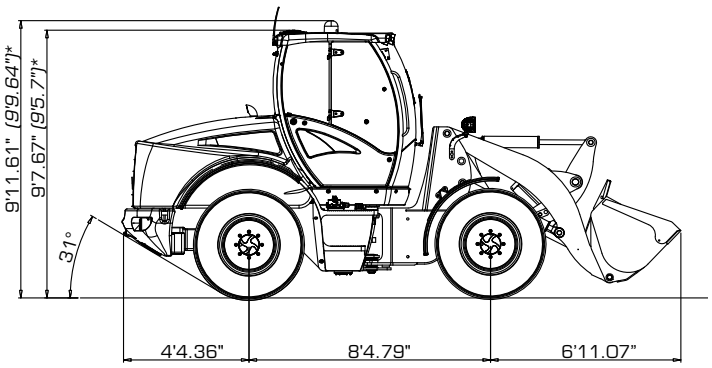

*(...) With optional 405/70 R24 tires

PERFORMANCE DATA

		STANDARD	MULTIPURPOSE	OVERSIZE	FORKS
Heaped Bucket Capacity (SAE)	yd³	1.83	1.44	2.62	/
Bucket width	ft in	7'4.58"	7'4.58"	8'2.43"	/
Bucket weight	lb	1,102	1,323	1,323	/
Max operating height	ft in	15'2.87" *(15'0.91")**	14'11.53" *(14'9.56")**	14'11.53" *(14'9.56")**	/
Fork length (standard)	ft in				3'3.37"
Fork length (optional)	ft in				3'11.24"
Hinge pin height	ft in	11'10.32" *(11'8.35")**	11'10.32" *(11'8.35")**	11'10.32" *(11'8.35")**	/
Dump angle	°	40°	40°	40°	/
Dump height	ft in	9'5.78" *(9'3.81")**	9'7.75" *(9'5.78")**	9'3.81" *(9'1.84")**	/
Dump distance	ft in	2'9.27" *(2'11.24")**	2'7.3" *(2'4.15")**	2'10.84" *(2'7.69")**	/
Static tipping load on a horizontal surface	lb	12,346	12,566	11,905	/
Static tipping load - mach. turned	lb	11,023	11,244	10,582	/
Fork tipping load - mach. turned	lb				8,267
Operating load EN 474-3 (80%) [•]	lb				6,614
Operating load EN 474-3 (60%) [•]	lb				4,960
Breakout force	lb	20,062	22,267	18,960	/
Max length in transfer position	ft in	19'4.28"	19'2.11"	19'8.02"	/
Bucket outer turning radius	ft in	17'3.48"	25'5.51" *(24'7.28")**	17'8.8"	/
Standard operating weight	lb	17,328 *(16,755)**	17,107 *(16.535)**	17,549 *(16,976)**	/

*(...) With optional 405/70 R24 tires [•] Load center at 19.69"

MOST COMMON OPTIONAL TIRES | OTHER TIRES UPON REQUEST



15,5 R25 MICHELIN XTLA

L2 tire for multiple uses on different terrains, with excellent traction force.

Machine width: ft in 6'10.95"



15,5 x 25 CAMSO LOADMASTER L3

Tire optimized for all surfaces, with excellent resistance to side impacts and improved stability.

Machine width: ft in 6'11.74"



405/70 R24 DUNLOP SPT9

Multi-purpose non-directional, radial tire for industrial and construction applications.

Machine width: ft in 7'3.28"



455/70 R24 DUNLOP SPT9

Non-directional, radial tire for construction and industrial applications.

Machine width: ft in 7'3.09"



440/80 R24 MICHELIN XCML

Long-life agricultural tire, exceptional traction and load capacity.

Machine width: ft in 7'5.41"



15,5 R25 NOKIAN LOADER GRIP 2

Tire for exceptional traction on soft or frozen ground.

Machine width: ft in 6'10.83"

8.63C
PARALLEL KINEMATICS

DIESEL ENGINE

4 in-line cylinders, supercharged, charge air cooling, electronically controlled, common-rail injection, exhaust gas recirculation, water cooling, dry filtration, oxidation catalyst (DOC) particulate filter (DPF) and selective catalytic reduction (SCR). Issued according to EC Directive 97/68 - Stage V/Tier 4f.

Type		Deutz TCD 3.6 L4
Max. power		94,5 kW - 128 HP
Calibration (RPM)		2.300
ISO/TR 14396 power		90 kW - 122 HP
EEC 80/1269 power		90 kW - 122 HP
Maximum torque	lbf ft	354
Bore	in	3.86
Stroke	in	4.72
Displacement	in^3	220.91

ELECTRIC SYSTEM

Battery	12 Volt
Capacity	110 Ah - 850 A
Alternator	95 A
Reverse gear alarm	Standard
Cabling compliant with regulations	IP 67 - DIN 40050

TRANSMISSION

Hydrostatic with electronic power regulation and closed circuit with variable displacement pump and motor. 3 driving modes: Automotive, Eco and Smart Forward Motion*. 2-speed mechanical gearbox with synchronizer (gear change from standstill).

2 Work Speeds	*Forward*	*Reverse*
1st gear km/h	0÷4	0÷4
2nd gear km/h	0÷8	0÷8

2 Transfer Speeds	*Forward*	*Reverse*
1st gear km/h	0÷11	0÷11
2nd gear km/h	0÷25**	0÷25**

** Optional, on request.* *** Self-limited maximum speed*

AXLES

Heavy Duty axles of the same size with epicyclic final reduction gears on each wheel. Rigid front axle. Oscillating rear axle with 25° travel.Distribution of the movement to the two front and rear axles by means of cardan shafts. Automatic self-locking differential on the front axle (optional on rear)

BRAKING SYSTEM

Service brake: hydraulic multi-disc oil bath on front & rear axles. Parking brake: negative hydraulic, electrically operated, on the front axle

TIRES

Standard	460/70 R24

STEERING SYSTEM

Power assisted steering by LOAD SENSING power steering.

Steering angle		80°
Tire inner turning radius	ft in	8'5.97"
Tire outer turning radius	ft in	15'11.73"
Bucket outer turning radius*	ft in	17'6.63"

** in transfer position*

HYDRAULIC SYSTEM

Comprising two gear pumps, the first for the loader and steering circuit with LOAD SENSING valve, the second for the fan circuit, having a double rotation speed. Modular 2-section distributor with general valve. Double acting jacks.
Hydraulic oil cooling radiator. Full-flow filter on the return circuit. Single lever servo control for 4-position lifting control and 3-position bucket control.

Max flow rate	gpm	27.74
Flow rate with high-flow kit (optional)	gpm	34.34
Loader calibration pressure	psi	3,336
Steering calibration pressure	psi	2,538
Lifting jacks	in	4.13x31.3
Bucket jacks	in	3.15x26.77
Lifting time (full)	s	5.4
Lowering time (empty)	s	3.9
Unloading time	s	1.8
Total cycle time	s	11.1

FLUIDS & LUBRICANTS

Engine	gal	2.11
Front differential	gal	2.43
Rear differential	gal	2.4
Reduction gear/adapter	gal	0.48
Hydraulic circuit	gal	33.81
Brake circuit	gal	0.24
Fuel	gal	36.98
Water radiator	gal	5.28
AdBlue	gal	5.28

TECHNICAL FEATURES


Standard bucket capacity	yd^3	1.57
Bucket width	ft in	7'4.58"
Static tipping load on a horizontal surface	lb	11,354
Static tipping load turned 40°	lb	10,141
Hydraulic lifting capacity at max. height	lb	22,046
Hinge pin height	ft in	12'4.62"
Dump height at 40°	ft in	9'8.93"
Dump distance at 40°	ft in	3'5.54"
Breakout force	lb	20,723


DIMENSIONS & WEIGHTS

Max length in transferl position	ft in	20'3.31"
Max. width in transfer position	ft in	7'4.58"
Tire outer width	ft in	7'3.8"
Tread width	ft in	5'9.68"
Pitch	ft in	8'4.79"
Clear span	in	9.84
Max height	ft in	9'5.78"
Standard operating weight	lb	18,078
Maximum permissible weight	lb	19,290

NOISE LEVEL

Noise level inside cabin ISO 6396 – LpA	dB(A)	69
External noise level ISO 6395 - LwA	dB(A)	101

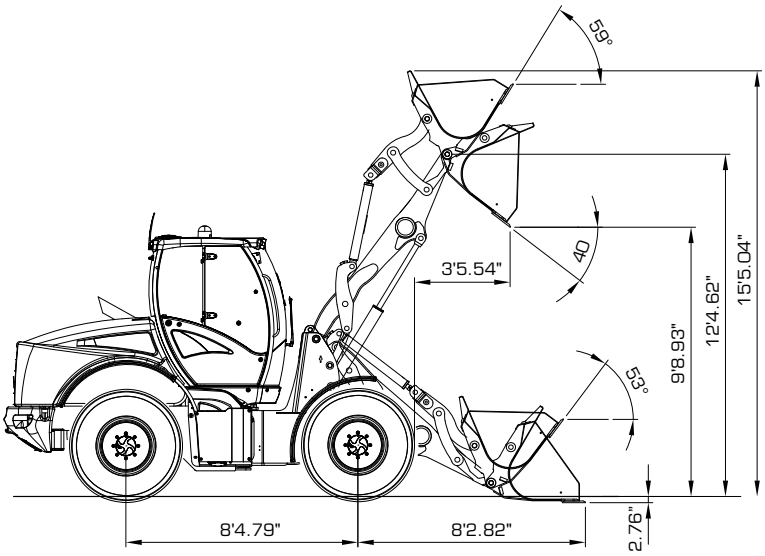

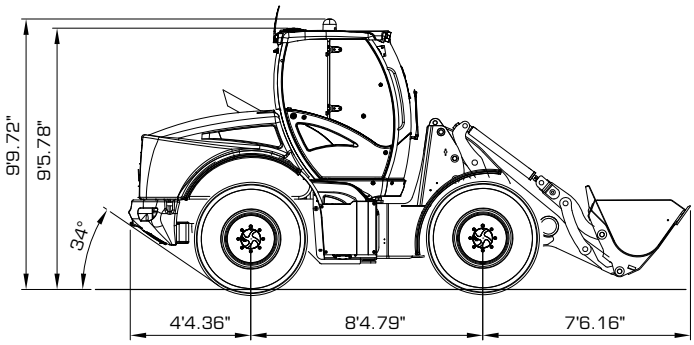

PERFORMANCE DATA

		STANDARD	MULTIPURPOSE	OVERSIZE	FORKS
Heaped Bucket Capacity (SAE)	yd³	1.57	1.44	2.62	/
Bucket width	ft in	7'4.58"	7'8.52"	8'2.43"	/
Bucket weight	lb	992	1,212	1.323	/
Max operating height	ft in	15'5.04"	15'1.69"	15'1.69"	/
Fork length (standard)	ft in				3'3.37"
Fork length (optional)	ft in				3'11.24"
Hinge pin height	ft in	12'4.62"	12'4.62"	12'4.62"	/
Dump angle	°	40°	40°	40°	/
Dump height	ft in	9'8.93"	9'10.9"	9'6.96"	/
Dump distance	ft in	3'5.54"	3'3.57"	3'7.11"	/
Static tipping load on a horizontal surface	lb	11,354	11,133	10,913	/
Static tipping load - mach. turned	lb	10,141	9,921	9,700	/
Fork tipping load - mach. turned	lb				7,716
Operating load EN 474-3 (80%) [•]	lb				6,173
Operating load EN 474-3 (60%) [•]	lb				4,630
Breakout force	lb	20,723	22,928	19,621	/
Max length in transfer position	ft in	20'3.31"	20'1.14"	20'7.05"	/
Bucket outer turning radius	ft in	17'6.63"	17'5.65"	17'11.94"	/
Standard operating weight	lb	18,078	18,298	18,409	/

[•] Load center at 19.69"

MOST COMMON OPTIONAL TIRES / OTHER TIRES UPON REQUEST



15,5 x 25
MIITAS EM60

L3 tire suitable for heavy use with excellent self-cleaning properties.

Machine width: ft in 6'10.83"



405/70 MITAS
EM01 o MPT21

Not directional multi-purpose tire.

Machine width: ft in 6'11.35"



440/80 R24
MICHELIN XCML

Agricultural tire long duration with high traction and high load capacity.

Machine width: ft in 7'3.05"



500/70 R24
ALLIANCE A580

Tirewith an exclusive profile which guarantees strong traction, specific for soft surfaces.

Machine width: ft in 7'5.57"

9.63D

Z KINEMATICS

DIESEL ENGINE

4 in-line cylinders, supercharged, charge air cooling, electronically controlled, common-rail injection, exhaust gas recirculation, water cooling, dry filtration, oxidation catalyst (DOC) particulate filter (DPF) and selective catalytic reduction (SCR). Issued according to EC Directive 97/68 - Stage V/Tier 4f.

Type		Deutz TCD 3.6 L4
Max. power		105 kW - 143 HP
Calibration (RPM)		2.300
ISO/TR 14396 power		100 kW - 136 HP
EEC 80/1269 power		100 kW - 136 HP
Maximum torque	lbf ft	369
Bore	in	3.86
Stroke	in	4.72
Displacement	in^3	220.91

ELECTRIC SYSTEM

Battery	12 Volt
Capacity	110 Ah - 850 A
Alternator	95 A
Reverse gear alarm	Standard
Cabling compliant with regulations	IP 67 - DIN 40050

TRANSMISSION

Hydrostatic with electronic power regulation and closed circuit with variable displacement pump and motor.
4 driving modes: Automotive, Work, Eco and Smart Forward Motion*. 2-speed mechanical gearbox with mechanical speed ratio variation (Shift On Fly).

2 Work Speeds	*Forward*	*Reverse*
1st gear mph	0 ÷ 4	0 ÷ 4
2nd gear mph	0 ÷ 10	0 ÷ 10

2 Transfer Speeds	*Forward*	*Reverse*
1st gear mph	0 ÷ 9	0 ÷ 9
2nd gear mph	0 ÷ 25**	0 ÷ 25**

** Optional, on request.* *** Self-limited maximum speed*

AXLES

Heavy Duty axles of the same size with epicyclic final reduction gears on each wheel. Rigid front axle.
Oscillating rear axle with 25° travel.
Distribution of the movement to the two front and rear axles by means of cardan shafts. Automatic self-locking differential on the front axle (optional on the rear).

BRAKING SYSTEM

Service brake: hydraulic multi-disc oil bath on front & rear axles.
Parking brake: negative hydraulic, electrically operated, on the front axle.

TIRES

Standard	17.5 x 25

STEERING SYSTEM

Power assisted steering by LOAD SENSING power steering.

Steering angle		80°
Tire inner turning radius	ft in	8'11.6"
Tire outer turning radius	ft in	16'1.23"
Bucket outer turning radius*	ft in	17'8.83"

** in transfer position*

HYDRAULIC SYSTEM

Comprising two gear pumps, the first for the loader and steering circuit with LOAD SENSING valve, the second for the fan circuit, having a double rotation speed
Modular 2-section distributor with general valve.
Double acting jacks. Hydraulic oil cooling radiator.
Full-flow filter on the return circuit.
Single lever servo control for 4-position lifting control and 3-position bucket control.

Max flow rate	gpm	40.95
Loader calibration pressure	psi	3,336
Steering calibration pressure	psi	2,538
Lifting jacks	in	3.94x32.09
Bucket jacks	in	4.72x14.96
Lifting time (full)	s	4.6
Lowering time (empty)	s	3.5
Unloading time	s	1.8
Total cycle time	s	9.9

FLUIDS & LUBRICANTS

Engine	gal	2.11
Front differential	gal	4.65
Rear differential	gal	3.14
Reduction gear/adapter	gal	0.48
Hydraulic circuit	gal	33.81
Brake circuit	gal	0.29
Fuel	gal	40.95
Water radiator	gal	5.28
AdBlue	gal	5.28

TECHNICAL FEATURES


Standard bucket capacity	yd^3	2.35
Bucket width	ft in	7'8.52"
Static tipping load on a horizontal surface	lb	13,669
Static tipping load turned 40°	lb	12,125
Hydraulic lifting capacity at max. height	lb	15,212
Hinge pin height	ft in	12'1.67"
Dump height at 40°	ft in	9'6.17"
Dump distance at 40°	ft in	2'8.09"
Breakout force	lb	18,960


DIMENSIONS & WEIGHTS

Max length in transfer position	ft in	20'0.16"
Max. width in transfer position	ft in	7'8.52"
Tire outer width	ft in	7'2.42"
Tread width	ft in	5'8.9"
Pitch	ft in	8'7.74"
Clear span	in	14.96
Max height	ft in	9'9.32"
Standard operating weight	lb	19,842
Maximum permissible weight	lb	22,289

NOISE LEVEL

Noise level inside cabin ISO 6396 – LpA	dB(A)	69
External noise level ISO 6395 - LwA	dB(A)	99

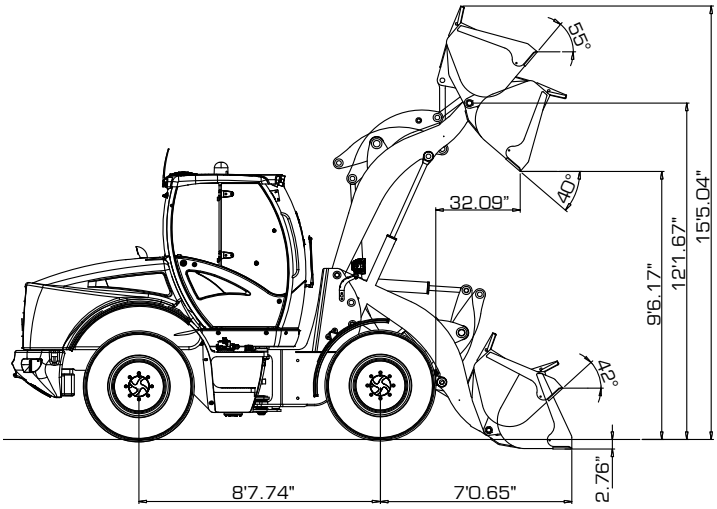

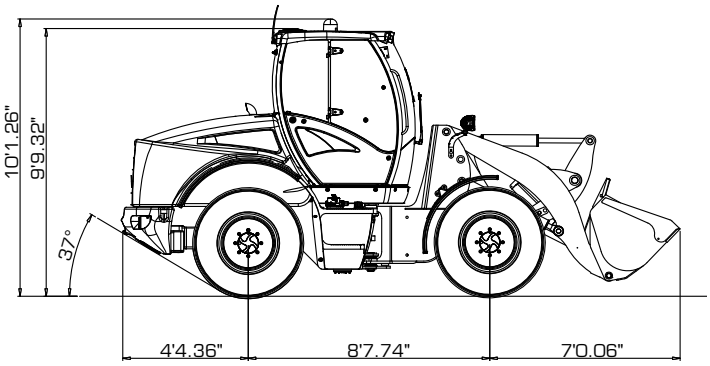

PERFORMANCE DATA

		STANDARD	MULTIPURPOSE	OVERSIZE	FORKS
Heaped Bucket Capacity (SAE)	yd³	2.35	1.7	2.88	/
Bucket width	ft in	7'8.52"	7'8.52"	8'2.43"	/
Bucket weight	lb	1,433	1,653	1,653	/
Max operating height	ft in	15'5.04"	15'2.91"	15'8.82"	/
Fork length (standard)	ft in				3'3.37"
Fork length (optional)	ft in				4'3.18"
Hinge pin height	ft in	12'1.67"	12'1.67"	12'1.67"	/
Dump angle	°	40°	40°	40°	/
Dump height	ft in	9'6.17"	9'8.14"	9'3.54"	/
Dump distance	ft in	2'8.09"	2'7.5"	3'0.38"	/
Static tipping load on a horizontal surface	lb	13,669	13,889	13,228	/
Static tipping load - mach. turned	lb	12,125	12,346	11,684	/
Fork tipping load - mach. turned	lb				10,141
Operating load EN 474-3 (80%) [•]	lb				8,113
Operating load EN 474-3 (60%) [•]	lb				6,085
Breakout force	lb	18,960	21,164	17,196	/
Max length in transfer position	ft in	20'0.16"	19'9.99"	20'3.11"	/
Bucket outer turning radius	ft in	17'8.83"	17'7.85"	18'1.76"	/
Standard operating weight	lb	19,842	20,062	20,062	/

[•] Load center at 19.69"

MOST COMMON OPTIONAL TIRES / OTHER TIRES UPON REQUEST



500/70 R24 MICHELIN XCML

Long-life agricultural tire with high traction and high load capacity.

Machine width: ft in 7'8.56"



15,5 R25 MICHELIN XTLA

High traction multi-purpose L2 tire.

Machine width: ft in 7'2.97"



15,5 x 25 CAMSO LOADMASTER L3

Optimized for multi-surface; high resistance to lateral impact and improved stability.

Machine width: ft in 6'11.74"



17,5 R25 AEOLUS A2233 L5

L5 tire with compound resistant to cut and impact. Very low puncture risk. Tread designed for exceptional traction and stability.

Machine width: ft in 7'2.81"



17,5 R25 MICHELIN XMINE D2 L5

Ideal tire for heavy loads, high strength and excellent traction/ adhesion compromise.

Machine width: ft in 7'4.19"



17,5 R25 NOKIAN GRS

All-season tire, ideal for winter conditions. Good driving comfort.

Machine width: ft in 7'2.54"

10.63D
PARALLEL KINEMATICS

DIESEL ENGINE

4 in-line cylinders, supercharged, charge air cooling, electronically controlled, common-rail injection, exhaust gas recirculation, water cooling, dry filtration, oxidation catalyst (DOC) particulate filter (DPF) and selective catalytic reduction (SCR). Issued according to EC Directive 97/68 - Stage V/Tier 4f.

Type		Deutz TCD 3.6 L4
Max. power		105 kW - 143 HP
Calibration (RPM)		2.300
ISO/TR 14396 power		100 kW - 136 HP
EEC 80/1269 power		100 kW - 136 HP
Maximum torque	lbf ft	369
Bore	in	3.86
Stroke	in	4.72
Displacement	in^3	220.91

ELECTRIC SYSTEM

Battery	12 Volt
Capacity	110 Ah - 850 A
Alternator	95 A
Reverse gear alarm	Standard
Cabling compliant with regulations	IP 67 - DIN 40050

TRANSMISSION

Hydrostatic with electronic power regulation and closed circuit with variable displacement pump and motor.
4 driving modes: Automotive, Work, Eco and Smart Forward Motion*. 2-speed mechanical gearbox with mechanical speed ratio variation (Shift On Fly).

2 Work Speeds	*Forward*	*Reverse*
1st gear mph	0 ÷ 4	0 ÷ 4
2nd gear mph	0 ÷ 10	0 ÷ 10

2 Transfer Speeds	*Forward*	*Reverse*
1st gear mph	0 ÷ 9	0 ÷ 9
2nd gear mph	0 ÷ 25**	0 ÷ 25**

** Optional, on request.* *** Self-limited maximum speed*

AXLES

Heavy Duty axles of the same size with epicyclic final reduction gears on each wheel. Rigid front axle.
Oscillating rear axle with 25° travel.
Distribution of the movement to the two front and rear axles by means of cardan shafts. Automatic self-locking differential on the front axle (optional on the rear).

BRAKING SYSTEM

Service brake: hydraulic multi-disc oil bath on front & rear axles.
Parking brake: negative hydraulic, electrically operated, on the front axle.

TIRES

Standard	17.5 x 25

STEERING SYSTEM

Power assisted steering by LOAD SENSING power steering.

Steering angle		80°
Tire inner turning radius	ft in	8'11.59"
Tire outer turning radius	ft in	16'1.22"
Bucket outer turning radius*	ft in	18'4.47"

** in transfer position*

HYDRAULIC SYSTEM

Comprising two gear pumps, the first for the loader and steering circuit with LOAD SENSING valve, the second for the fan circuit, having a double rotation speed.
Modular 2-section distributor with general valve. Double acting jacks. Hydraulic oil cooling radiator. Full-flow filter on the return circuit.Single lever servo control for 4-position lifting control and 3-position bucket control.

Max flow rate	gpm	40.95
Loader calibration pressure	psi	3,336
Steering calibration pressure	psi	2,538
Lifting jacks	in	4.13x30.31
Bucket jacks	in	3.15x26.77
Lifting time (full)	s	4.6
Lowering time (empty)	s	3.5
Unloading time	s	1.8
Total cycle time	s	9.9

FLUIDS & LUBRICANTS

Engine	gal	2.11
Front differential	gal	4.65
Rear differential	gal	3.14
Reduction gear/adapter	gal	0.48
Hydraulic circuit	gal	33.81
Brake circuit	gal	0.29
Fuel	gal	40.95
Water radiator	gal	5.28
AdBlue	gal	5.28

TECHNICAL FEATURES


Standard bucket capacity	yd^3	2.35
Bucket width	ft in	7'8.52"
Static tipping load on a horizontal surface	lb	12,787
Static tipping load turned 40°	lb	11,464
Hydraulic lifting capacity at max. height	lb	21,826
Hinge pin height	ft in	12'5.61"
Dump height at 40°	ft in	9'4.2"
Dump distance at 40°	ft in	3'7.31"
Breakout force	lb	17,637


DIMENSIONS & WEIGHTS

Max length in transfer position	ft in	20'5.28"
Max. width in transfer position	ft in	7'8.52"
Tire outer width	ft in	7'2.42"
Tread width	ft in	5'8.9"
Pitch	ft in	8'7.74"
Clear span	in	14.96
Max height	ft in	9'9.32"
Standard operating weight	lb	20,944
Maximum permissible weight	lb	22,289

NOISE LEVEL

Noise level inside cabin ISO 6396 – LpA	dB(A)	69
External noise level ISO 6395 - LwA	dB(A)	99

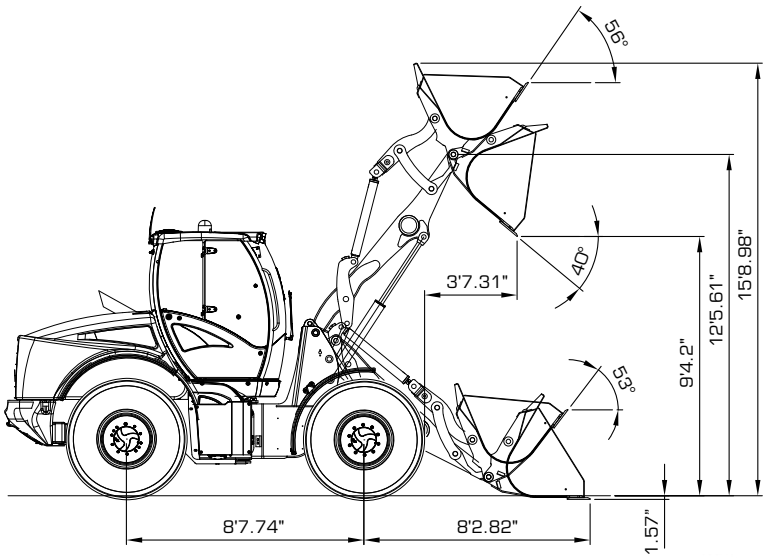

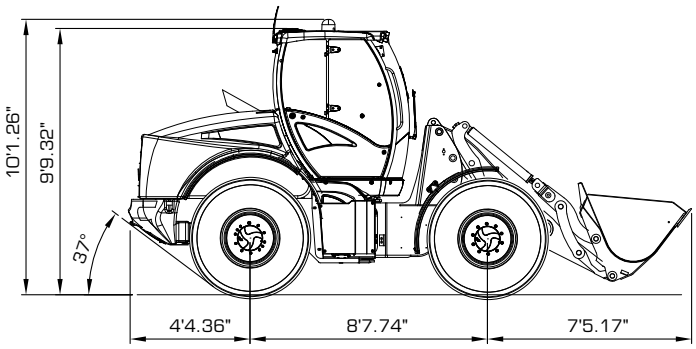

PERFORMANCE DATA

		STANDARD	MULTIPURPOSE	OVERSIZE	FORKS
Heaped Bucket Capacity (SAE)	yd³	2.35	1.7	2.88	/
Bucket width	ft in	7'8.52"	7'8.52"	8'2.43"	/
Bucket weight	lb	1,433	1,653	1,653	/
Max operating height	ft in	15'8.98"	15'11.1"	16'1.9"	/
Fork length (standard)	ft in				3'3.37"
Fork length (optional)	ft in				4'3.18"
Hinge pin height	ft in	12'5.61"	12'5.61"	12'5.61"	/
Dump angle	°	40°	40°	40°	/
Dump height	ft in	9'4.2"	9'6.17"	9'4.48"	/
Dump distance	ft in	3'7.31"	3'6.72"	3'7.03"	/
Static tipping load on a horizontal surface	lb	12,787	13,007	12,346	/
Static tipping load - mach. turned	lb	11,464	11,684	10,803	/
Fork tipping load - mach. turned	lb				9,259
Operating load EN 474-3 (80%) [•]	lb				7,496
Operating load EN 474-3 (60%) [•]	lb				5,512
Breakout force	lb	17,637	19,842	17,805	/
Max length in transfer position	ft in	20'5.28"	20'3.11"	20'8.23"	/
Bucket outer turning radius	ft in	18'4.47"	18'3.49"	18'9.43"	/
Standard operating weight	lb	14,330	21,164	21,164	/

[•] Load center at 19.69"

MOST COMMON OPTIONAL TIRES / OTHER TIRES UPON REQUEST



17,5 x 25 MITAS EM60

Tread designed for heavy duty use on construction sites and combined conditions. Excellent self-cleaning properties.

Machine width: ft in 7'2.42"



500/70 R24 MICHELIN XCML

Long-life agricultural tire with high traction and high load capacity.

Machine width: ft in 7'8.56"



15,5 R25 MICHELIN XTLA

High traction multi-purpose L2 tire.

Machine width: ft in 7'2.97"



15,5 x 25 CAMSO LOADMASTER L3

Tire optimized for multi-surface use; high resistance to lateral impact and improved stability.

Machine width: ft in 6'11.74"



17,5 R25 AEOLUS A2233 L5

L5 tire, cut- and impact-resistant compound. Minimal puncture risk. Tread designed for exceptional traction and stability.

Machine width: ft in 7'2.81"



17,5 R25 MICHELIN XMINE D2 L5

Ideal tire for heavy loads, high strength and excellent traction/adhesion compromise.

Machine width: ft in 7'4.19"



17,5 R25 NOKIAN GRS

All-season tire, ideal for winter conditions. Good driving comfort.

Machine width: ft in ft in 7'2.54"











The illustrations on the present folder do not necessarily show the product standard version. Data and dimensions described in this folder are not binding. Venieri reserves the right of carrying out possible changes at any time and without previous notice because of its policy of steady developement and improvement of the products.

IMPERIAL-A-US (2025)

proartegrafica.it

100% MADE IN ITALY

MOTOR VALLEY

QUALITY SYSTEM CERTIFICATION DNV ISO 9001

ENVIRONMENTAL SYSTEM CERTIFICATION DNV ISO 14001

Venieri SPA
EARTHMOVING MACHINES

VF Venieri S.p.A. a Socio Unico
Via Piratello, 106 - 48022 Lugo (RA) - ITALY
Tel. +39 0545 904411
e-mail: info@vf-venieri.com | **www.vf-venieri.com**

Spare Parts
Tel. +39 0545 904429
e-mail: ricambi1@vf-venieri.com